
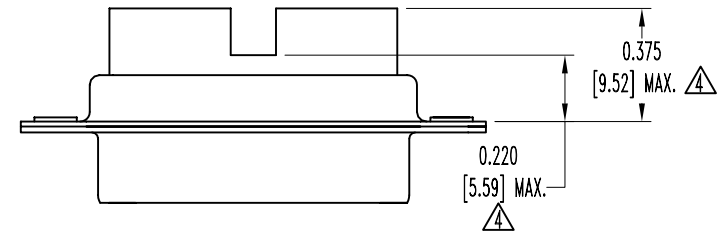
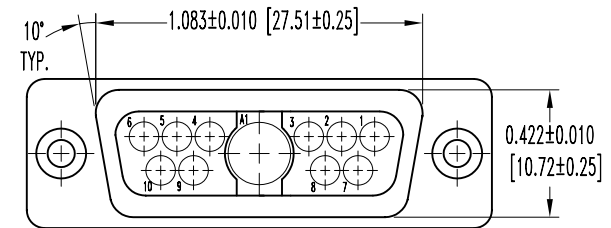


SK2357


POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
3-1-06	A	ECO 25579		ME	

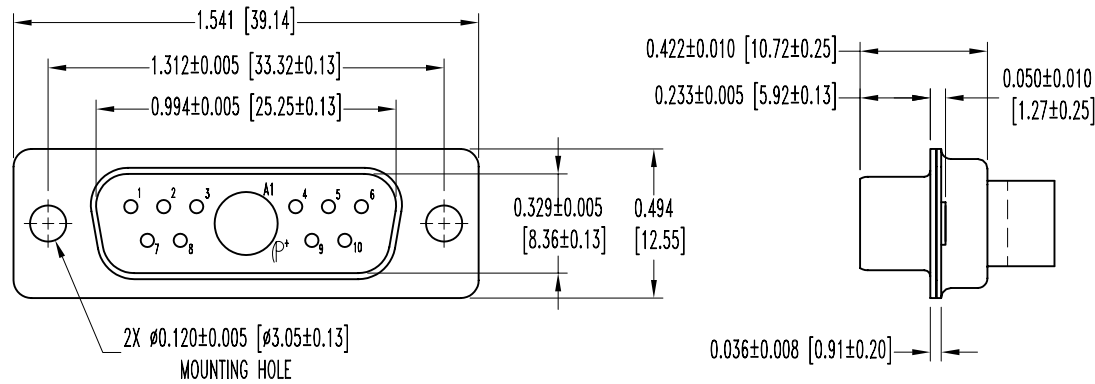

NOTES:

- MATERIALS AND FINISHES:  
INSULATOR: GLASS FILLED POLYESTER PER MIL-M-24519 UL94V-0, BLUE COLOR.  
SHELLS: STEEL, ZINC PLATE WITH DICHROMATE SEAL.
- ELECTRICAL CHARACTERISTICS:  
INSULATOR RESISTANCE: 5 G OHMS.  
WORKING VOLTAGE: 300 V r.m.s.
- TEMPERATURE RANGE: -55°C TO +125°C.
- 0.220 [5.59] MAX. IS FOR POWER CONTACT POSITION ONLY AND 0.375 [9.53] MAX. IS FOR SIGNAL CONTACT POSITIONS ONLY.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

 <b>POSITRONIC INDUSTRIES INC.</b> www.connectpositronic.com		SCALE <b>N.T.S.</b>		DRAWN BY <b>M. ENEA</b>	
DECIMAL TOL. <b>± 0.015 [0.38]</b>		<b>CBC SERIES</b>		APPROVED BY	
<b>TITLE</b> <b>CBC11W1M00000</b>					
ANGULAR TOL. <b>± 5°</b>		DATE <b>3-1-06</b>		DRAWING NUMBER <b>SK2357</b>	
					REV. <b>A</b>