
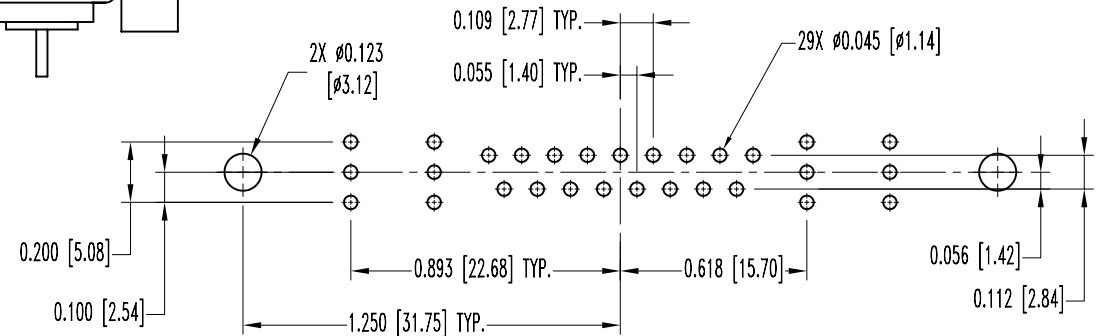
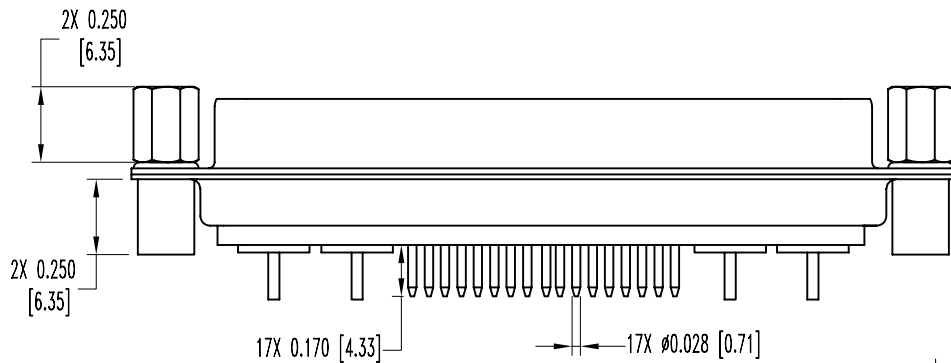
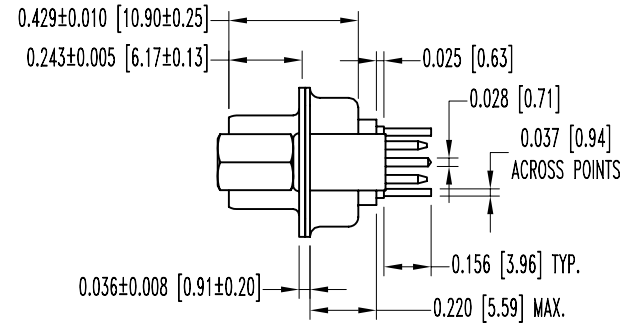


SK6579

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
9-15-05	NC	ECO 24657		ME	

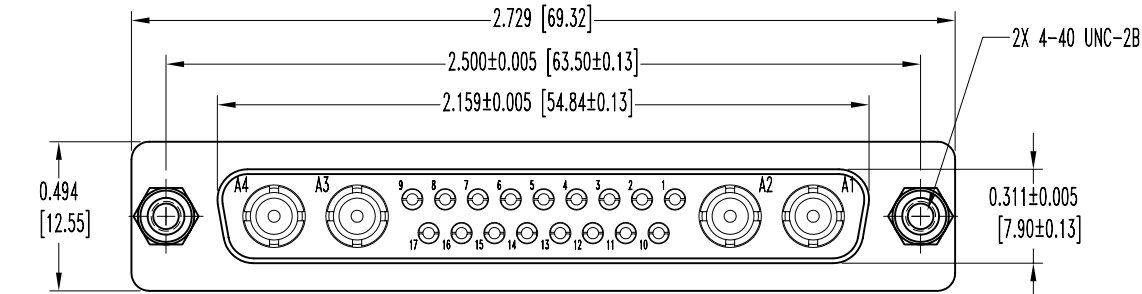

NOTES:

- MATERIALS AND FINISHES:  
 INSULATOR: GLASS FILLED POLYESTER PER MIL-M-24519 UL94V-0, BLUE COLOR.  
 SIGNAL CONTACTS: PRECISION MACHINED HIGH TENSILE PHOSPHOR BRONZE, GOLD FLASH OVER NICKEL PLATE.  
 SHIELDED CONTACTS: MACHINED OF HIGH CONDUCTIVITY COPPER ALLOY, 0.000030 [0.76µ] GOLD OVER NICKEL.  
 SHELLS: STEEL, TIN PLATED.  
 JACKSCREWS: BRASS, ZINC PLATE WITH DICHROMATE SEAL.  
 SPACERS: STEEL, TIN PLATED.
- ELECTRICAL CHARACTERISTICS:  
 CONTACT CURRENT RATING: SIGNAL: 7.5 AMPERES NOMINAL.  
 INITIAL CONTACT RESISTANCE: SIGNAL: 0.008 OHMS MAXIMUM. SHIELDED: 0.008 OHMS MAXIMUM.  
 INSULATOR RESISTANCE: 5 G OHMS.  
 WORKING VOLTAGE: 300 V r.m.s.
- TEMPERATURE RANGE: -55°C TO +125°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

		<b>POSITRONIC INDUSTRIES INC.</b> www.connectpositronic.com	
		DECIMAL TOL. ± 0.015 [0.38]	TITLE <b>CBD21WA4F65S0TX</b>
ANGULAR TOL. ± 5°	DATE <b>9-15-05</b>	DRAWING NUMBER <b>SK6579</b>	SCALE N.T.S.
DRAWN BY <b>M. ENEA</b>		APPROVED BY	
REV.		CK	