THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IT'S SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK4270

DATE	REV	REVISION RECORD	APP	DR	CK
4-19 02	NC	ECO 19293	RW	JLG	TK
3-5 10	A	ECO 32198	COLE	BE	COLE

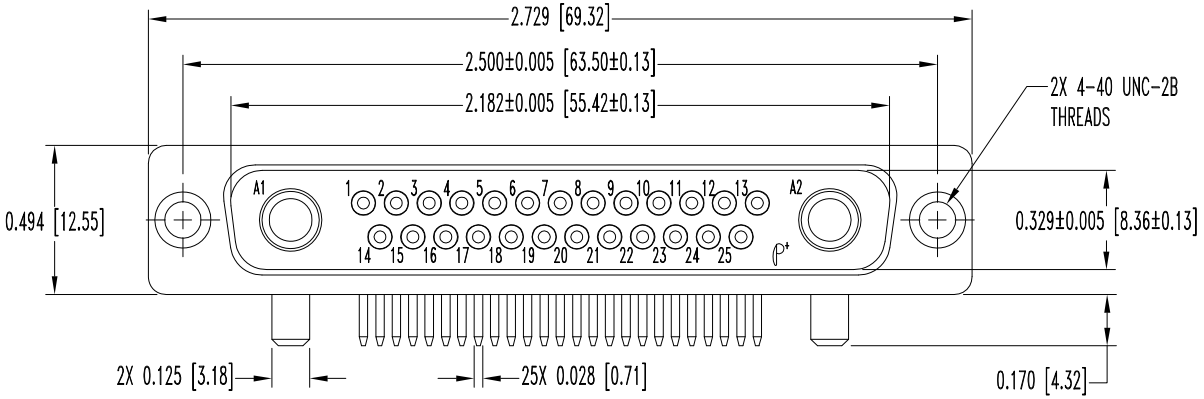

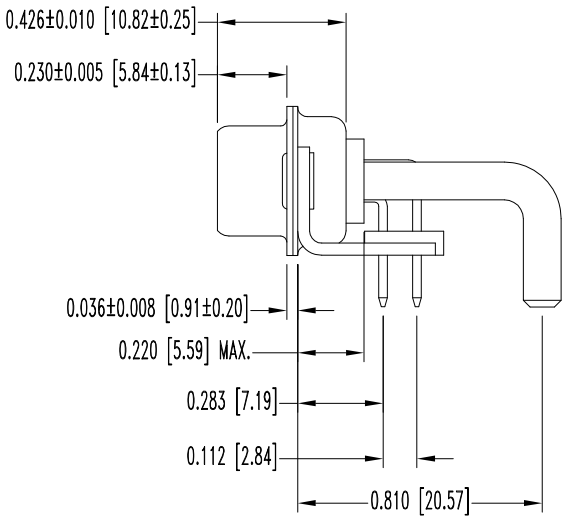

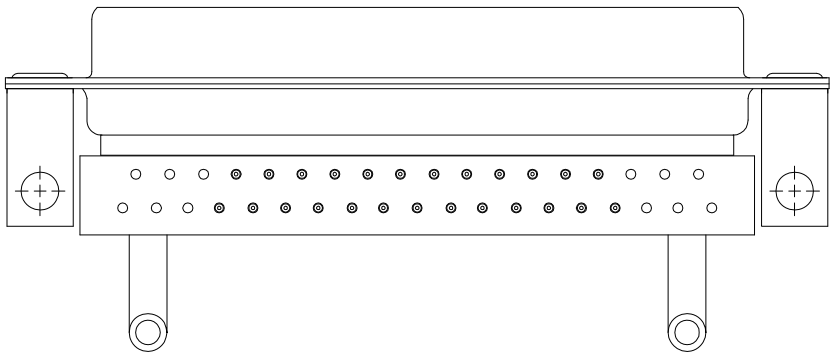

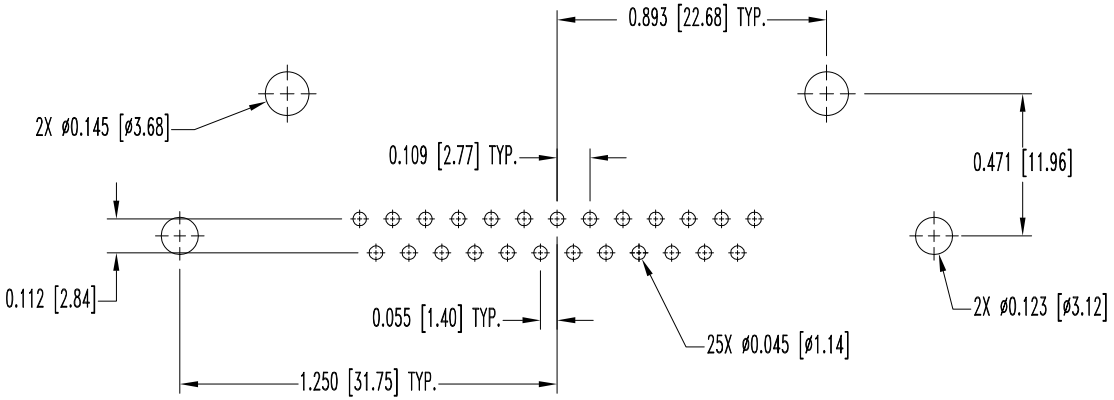

CONTACT HOLE PATTERN

NOTES:
1. MATERIALS AND FINISHES:
   INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927 UL 94V-0, BLUE COLOR.
   SIGNAL CONTACTS: PRECISION MACHINED BRASS ALLOY, GOLD FLASH OVER NICKEL PLATE.
   POWER CONTACTS: HIGH CONDUCTIVITY COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.
   SHELLS: STEEL, ZINC PLATE WITH DICHROMATE SEAL.
2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY COMBO-D PRODUCT PUBLICATION.
   VISIT CONNECTPOSITRONIC.COM/PRODUCTS/1/STANDARDDENSITYCOMBO-D OR CONNECTPOSITRONIC.COM.
3. DIMENSIONS ARE IN INCHES [MILLIMETERS].

POSITRONIC INDUSTRIES INC.
www.connectpositronic.com
FSCM 28198

DECIMAL TOL. ±0.015 [0.38]
WF # 4453
ANGULAR TOL. ±5°

CBD SERIES
SCALE N.T.S.
DRAWN BY J. GREEN
APPROVED BY RW

TITLE
CBD27W2M57R7000

DATE 4-19-02
DRAWING NUMBER SK4270
REV. A