
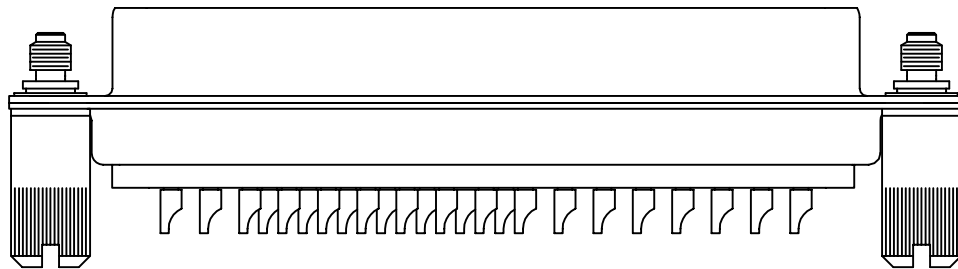
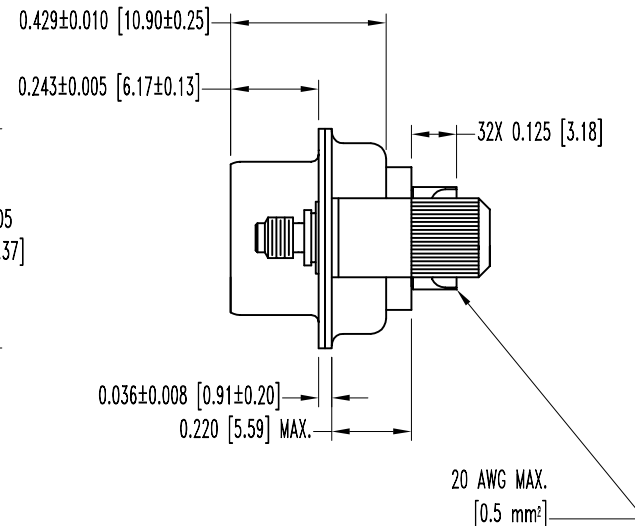


SK4373

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
6-21-02	NC	ECO 19621		ME	

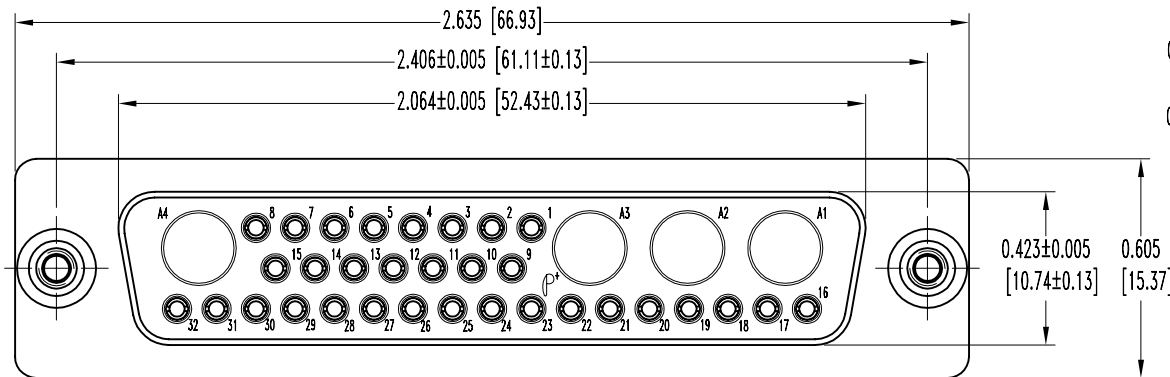

NOTES:

- MATERIALS AND FINISHES:
 - INSULATOR: GLASS FILLED POLYESTER PER MIL-M-24519 UL 94V-0, BLUE COLOR.
 - SIGNAL CONTACTS: PRECISION MACHINED HIGH TENSILE PHOSPHOR BRONZE, GOLD FLASH OVER NICKEL PLATE.
 - SHELLS: STEEL, ZINC PLATED WITH DICHROMATE SEAL.
 - JACKSCREW SYSTEMS: STEEL WITH ZINC PLATE AND DICHROMATE SEAL.
- ELECTRICAL CHARACTERISTICS:
 - CONTACT CURRENT RATING: SIGNAL: 7.5 AMPERES NOMINAL.
 - INITIAL CONTACT RESISTANCE: SIGNAL: 0.008 OHMS MAXIMUM.
 - INSULATOR RESISTANCE: 5 G OHMS.
 - WORKING VOLTAGE: 300 V r.m.s.
- TEMPERATURE RANGE: -55°C TO +125°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

		POSITRONIC INDUSTRIES INC. www.connectpositronic.com	
		DECIMAL TOL. ± 0.015 [0.38]	TITLE CBD SERIES
WF # 4611	CBD36W4F200E0		
ANGULAR TOL. ± 5°	DATE 6-21-02	DRAWING NUMBER SK4373	REV. NC