
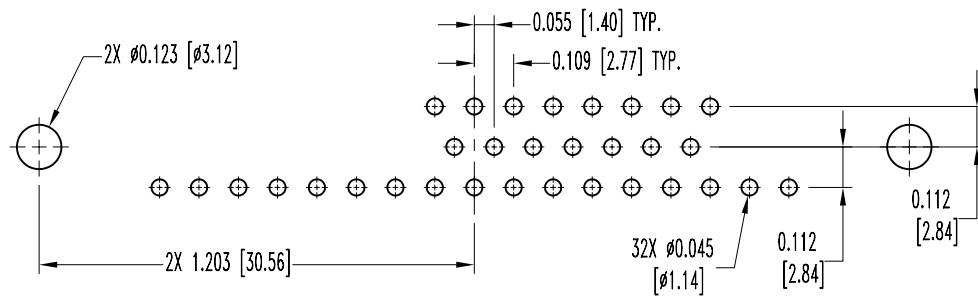
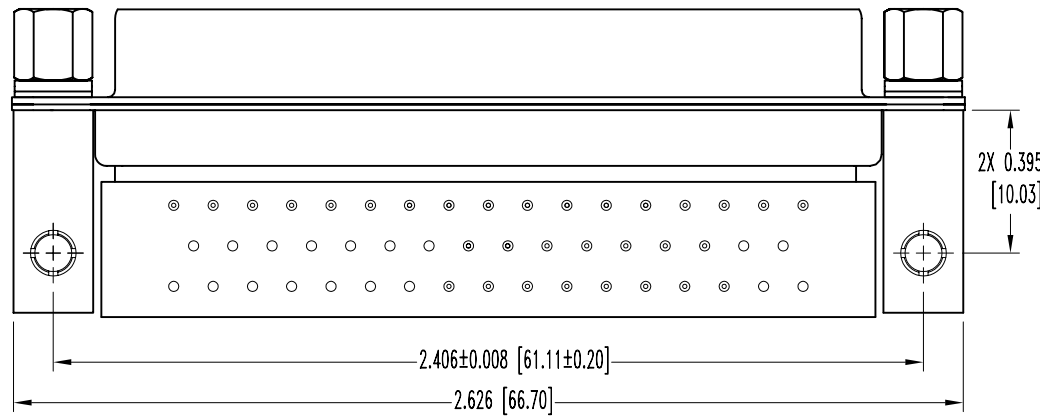
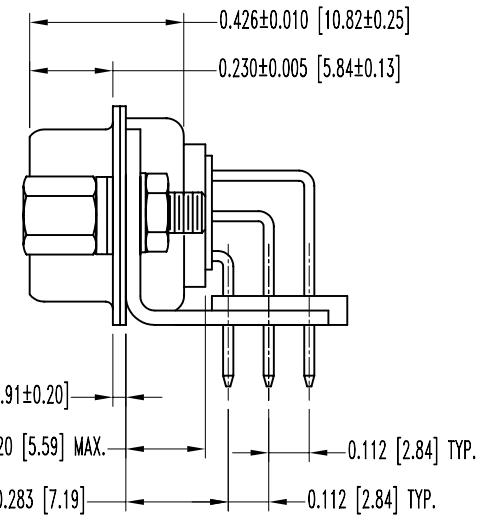


SK3628

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
3-6-01	NC	ECO 17429	TK	YK	JG
6-21-04	A	ECO 22582		ME	

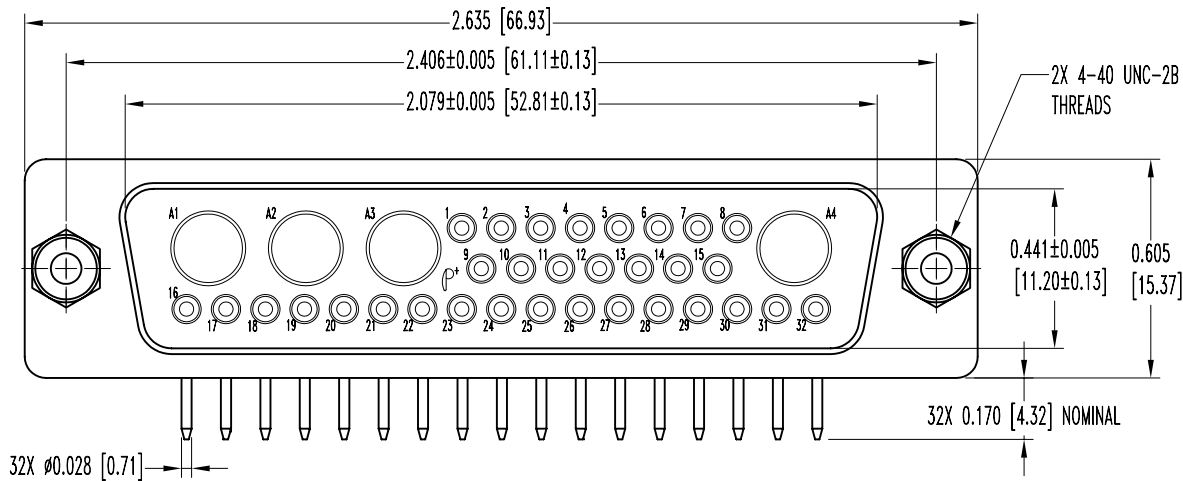

CONTACT HOLE PATTERN

NOTES:

- MATERIALS AND FINISHES:
 INSULATOR: GLASS FILLED POLYESTER PER MIL-M-24519 UL 94V-0, BLUE COLOR.
 SIGNAL CONTACTS: BRASS, GOLD FLASH OVER NICKEL PLATE.
 BRACKETS: BRASS, ZINC PLATE.
 SHELLS: STAINLESS STEEL PASSIVATED WITH DICHROMATE SEAL.
 JACKSCREWS: STEEL WITH ZINC PLATE AND DICHROMATE SEAL.
 ALIGNMENT BAR: GLASS FILLED NYLON.
- ELECTRICAL CHARACTERISTICS:
 CONTACT CURRENT RATING: 7.5 AMPERES NOMINAL.
 INITIAL CONTACT RESISTANCE: 0.008 OHMS MAXIMUM.
 INSULATOR RESISTANCE: 5 G OHMS.
 WORKING VOLTAGE: 300 V r.m.s.
- TEMPERATURE RANGE: -55°C TO +125°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

 POSITRONIC INDUSTRIES INC. www.connectpositronic.com		SCALE	DRAWN BY
		N.T.S.	Y. KELLEYBREW
DECIMAL TOL.	CBD SERIES	APPROVED BY	
± 0.015 [0.38]		T. KEPLEY	
ANGULAR TOL.	TITLE		
± 5°	CBD36W4M500T2S		
DATE	DRAWING NUMBER	REV.	
3-6-01	SK3628	A	