

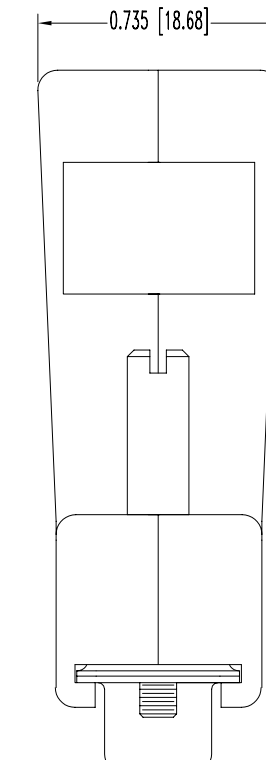



SK3786

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
6-7-01	NC	ECO 17861		JLG	

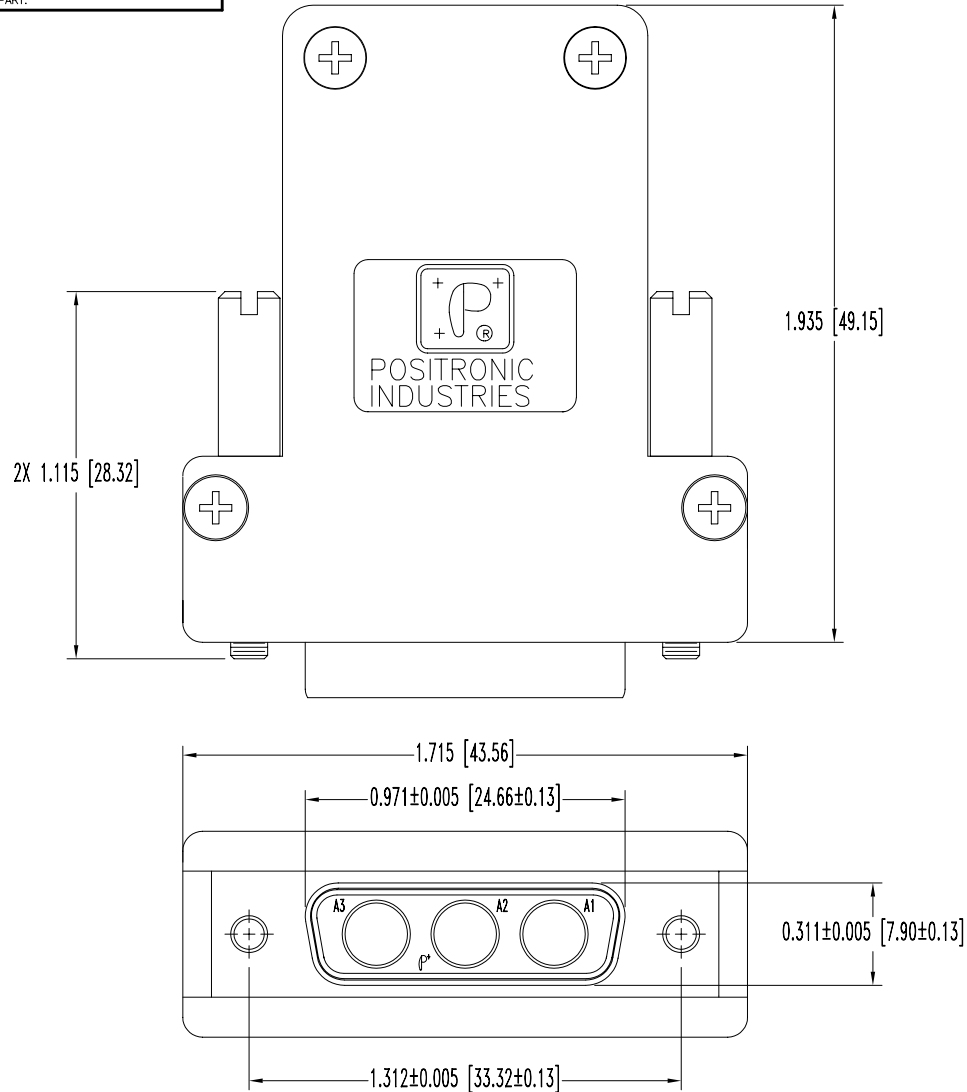


TYPICAL INSERT

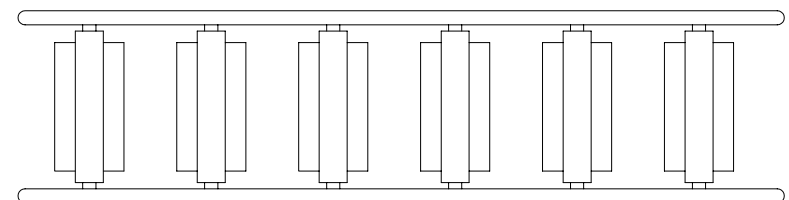

INSERT TREE ASSEMBLY

NOTES:

- MATERIALS AND FINISHES:  
 INSULATOR: GLASS FILLED POLYESTER PER MIL-M-24519, UL 94V-0, BLUE COLOR.  
 SHELLS: STEEL, ZINC PLATE WITH DICHROMATE SEAL.  
 HOOD: COMPOSITE.  
 JACKSCREWS: STEEL, ZINC PLATED WITH DICHROMATE SEAL.
- ELECTRICAL CHARACTERISTICS:  
 INSULATOR RESISTANCE: 5 G OHMS.  
 WORKING VOLTAGE: 300 V r.m.s.
- TEMPERATURE RANGE: -55°C TO +125°C.
- TREE INSERT KITTED WITH CONNECTOR.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

	<b>POSITRONIC INDUSTRIES INC.</b> www.connectpositronic.com		FSCM 28198
	CBD SERIES	SCALE N.T.S.	DRAWN BY J. GREEN
DECIMAL TOL. ± 0.015 [0.38]	TITLE CBD3W3F00Z0		
WF # 3719	DATE 6-7-01	DRAWING NUMBER SK3786	REV. NC
ANGULAR TOL. ± 5°			