

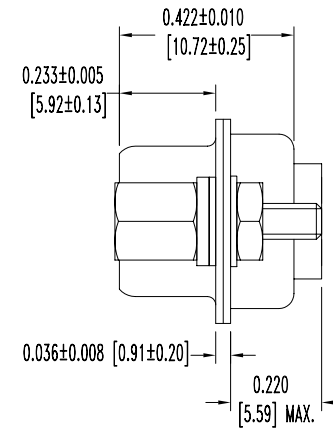


POSITRONIC ASIA PTE. LTD. BELIEVES THE DATA ON THE DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASIA PTE. LTD. ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	DRN	CKD	APP
3 FEB 06	A	PA ECO 06023		EH	

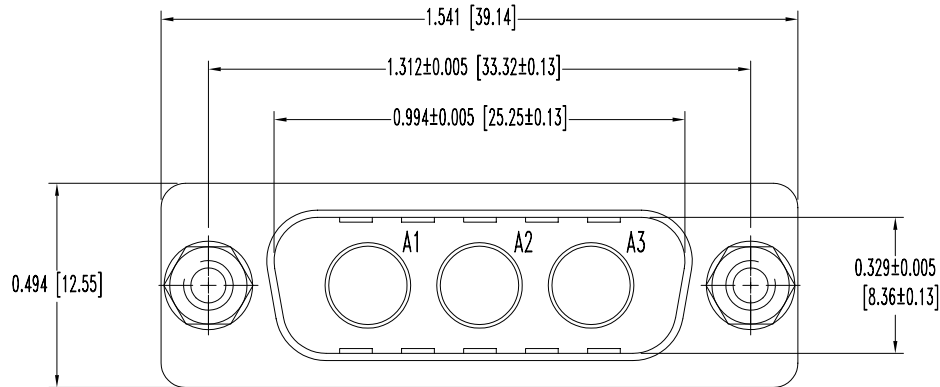

2X FIXED JACKSCREWS 4-40 UNC-2B THREADS

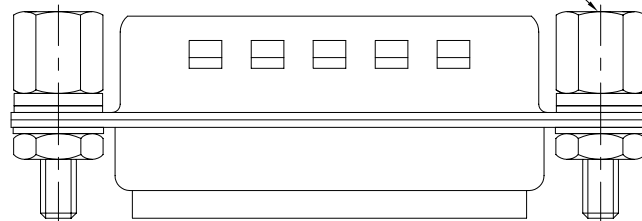

NOTES:

- MATERIALS AND FINISHES:
 INSULATOR: GLASS FILLED POLYESTER PER MIL-M-24519, UL 94V-0, BLUE COLOR.
 SHELLS: STEEL, TIN PLATE AND DIMPLED.
 JACKSCREWS SYSTEM: STEEL, ZINC PLATE WITH DICHROMATE STEEL.
- ELECTRICAL CHARACTERISTICS:
 INSULATOR RESISTANCE: 5 G OHMS.
 WORKING VOLTAGE: 300 V r.m.s.
 TEMPERATURE RANGE: -55°C TO +125°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

	POSITRONIC ASIA PTE. LTD. 3014A UBI ROAD 1, #07-01. SINGAPORE 408703. Tel: (65) 6842-1419 / Fax: (65) 6842-1421 / Email: singapore@connectpositronic.com				
	SERIES CBD	SCALE NTS	DRAWN YH	CHECKED -	APPROVED -
GENERAL TOL. LINEAR : ±0.38 [0.015] ANGULAR : ±5°					
TITLE CBD3W3M000TZZ					
UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS [INCHES]		DATE 13 MAY 02	DRAWING NUMBER ASK20087	SHEET 1	REV. CF 1

EC

A