
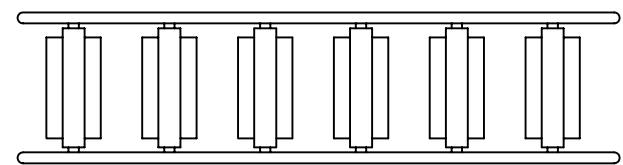



SK6475

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
8-15-06	NC	ECO 24507		YK	

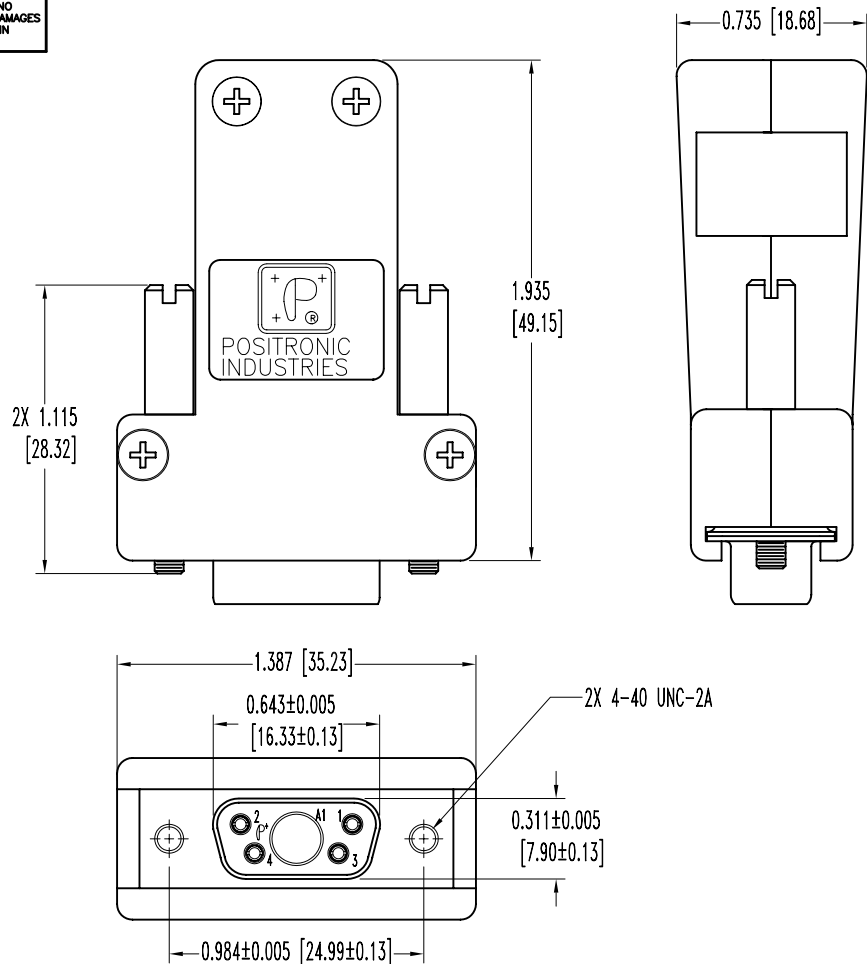

- NOTES:
- MATERIALS AND FINISHES:
 - INSULATOR: GLASS FILLED POLYESTER PER MIL-M-24519 UL 94V-0, COLOR: BLUE.
 - CONTACTS: PRECISION MACHINED HIGH TENSILE BRONZE, GOLD FLASH OVER NICKEL PLATE.
 - SHELLS: STEEL WITH TIN PLATE.
 - HOOD: COMPOSITE, CONDUCTIVE VOLUME RESISTIVITY (1.0 OHM-cm MAX.), UL94V-0.
 - ATTENUATION: 40+ DECIBELS.
 - JACKSCREWS: STEEL WITH ZINC PLATE.
 - SCREWS: STAINLESS STEEL, PASSIVATE.
 - ELECTRICAL CHARACTERISTICS:
 - CONTACT CURRENT RATING: 7.5 AMPERES NOMINAL.
 - INITIAL CONTACT RESISTANCE: 0.008 OHMS MAXIMUM.
 - INSULATOR RESISTANCE: 5 G OHMS.
 - WORKING VOLTAGE: 300 V r.m.s.
 - TEMPERATURE RANGE: -55°C TO +125°C.
 - DIMENSIONS ARE IN INCHES [MILLIMETERS].

	POSITRONIC INDUSTRIES INC. www.connectpositronic.com		SCALE	DRAWN BY
	CBD SERIES		N.T.S.	YK
DECIMAL TOL. ± 0.015 [0.38]	TITLE CBD5W1F20Z0X		APPROVED BY	
ANGULAR TOL. ± 5°	DATE 8-15-06	DRAWING NUMBER SK6475	REV. NC	