POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK3262

DATE	REV	REVISION RECORD	APP	DR	CK
1-28 00	NC	ECO 16011	RCW	ME	MZ
10-7 05	A	ECO 24788		LO	

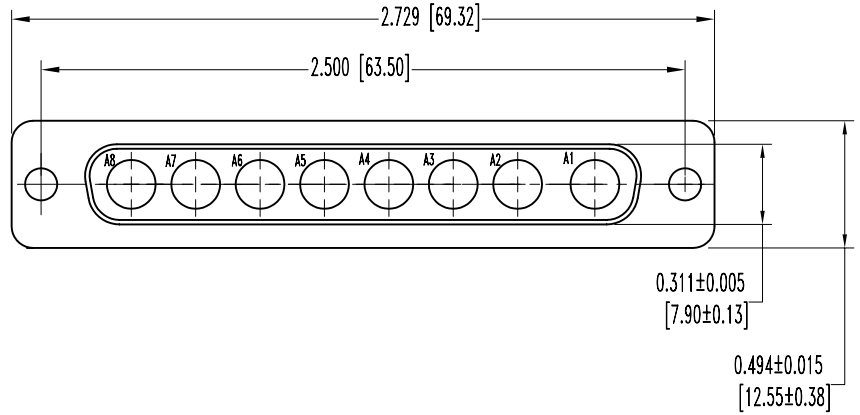

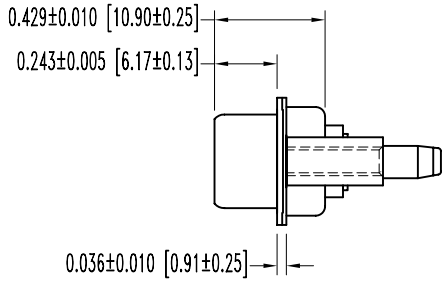

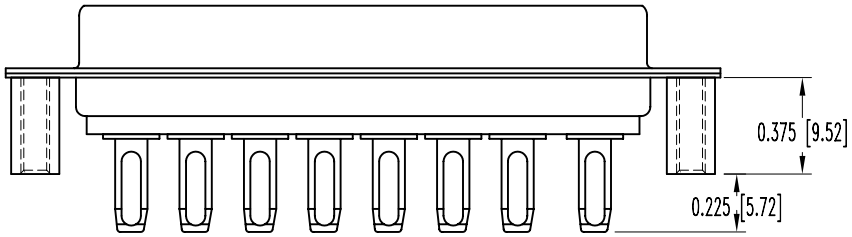

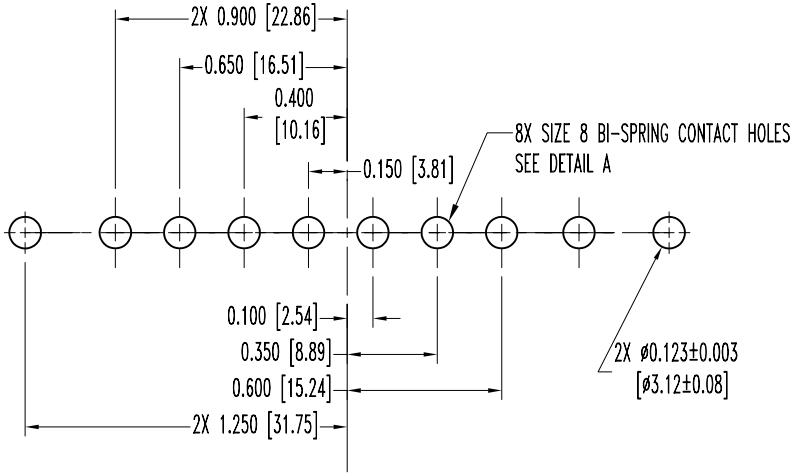

CONTACT HOLE PATTERN

NOTES:

1. MATERIALS AND FINISHES:
   INSULATORS: GLASS FILLED POLYESTER PER MIL-M-24519, UL 94V-0, BLUE COLOR.
   SHELLS: STEEL, ZINC PLATE WITH DICHROMATE SEAL.
   CONTACTS: COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.
   SPACERS: BRASS, ZINC PLATE WITH DICHROMATE SEAL.
2. ELECTRICAL CHARACTERISTICS:
   INSULATOR RESISTANCE: 5 G OHMS.
   TEMPERATURE RANGE: -55°C TO +125°C.
3. DIMENSIONS ARE IN INCHES [MILLIMETERS].



PRESS-FIT CONTACT HOLE SEE SK6370

DETAIL A

POSITRONIC INDUSTRIES INC.
www.connectpositronic.com

DECIMAL TOL. ± 0.015 [0.38]	CBD SERIES	SCALE N.T.S.	DRAWN BY M.ENEA / APPROVED BY R. WILLIAMS
	TITLE CBD8W8F93S7000		
ANGULAR TOL. ± 5°	DATE 1-28-00	DRAWING NUMBER SK3262	REV. A