THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IT'S SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK10765

DATE	REV	REVISION RECORD	APP	DR	CK
8-05 09	NC	ECO 31056	RCW	BS	TK
3-24 10	A	ECO 32270	COLE	BE	COLE

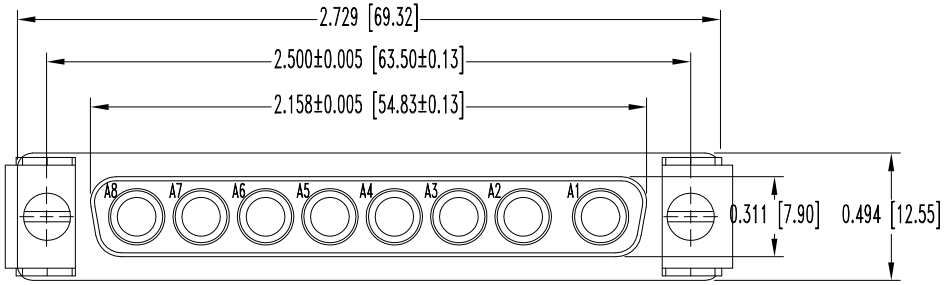

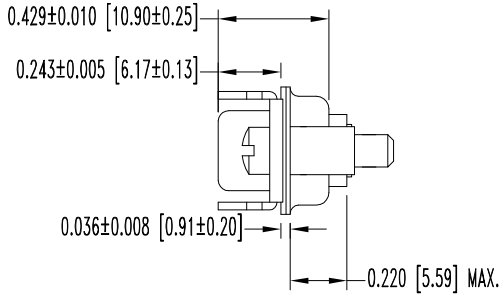

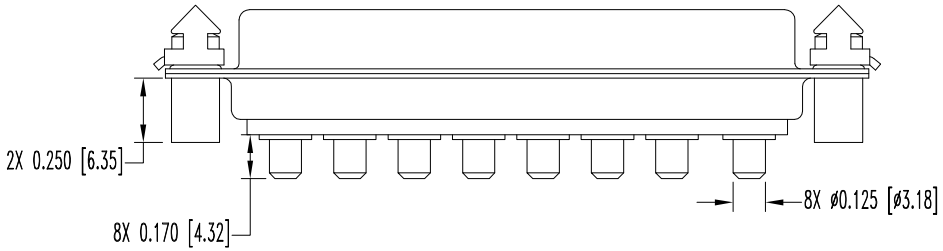

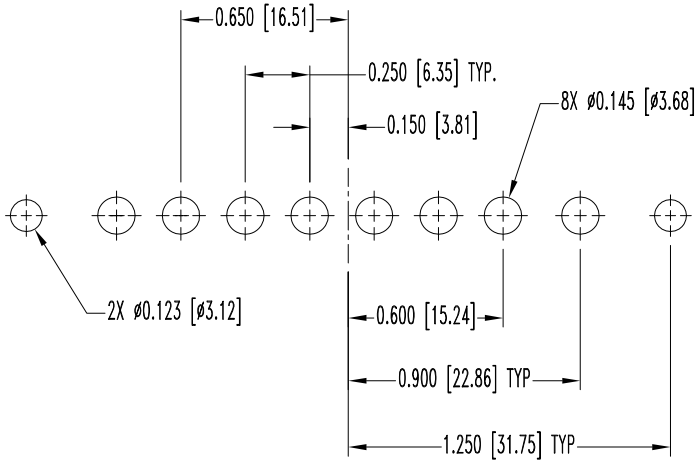

CONTACT HOLE PATTERN

NOTES:

1. MATERIALS AND FINISHES:
   INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, COLOR: BLUE.
   CONTACTS: PRECISION MACHINED COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.
   SHELLS: STEEL, ZINC PLATE WITH CHROMATE SEAL,
   JACKSCREWS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
   SPACERS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY COMBO-D PRODUCT PUBLICATION.
   VISIT CONNECTPOSITRONIC.COM/PRODUCTS/1/STANDARDDENSITYCOMBO-D OR CONNECTPOSITRONIC.COM.
3. DIMENSIONS ARE IN INCHES [MILLIMETERS].

POSITRONIC INDUSTRIES INC.
www.connectpositronic.com
FSCM 28198

DECIMAL TOL. ±0.015 [0.38]
ANGULAR TOL. ±5°

CBM SERIES

SCALE N.T.S.

DRAWN BY B SHELLEDY
APPROVED BY R WILLIAMS

TITLE CBM8W8S37S0V30

DATE 8-25-09
DRAWING NUMBER SK10765
REV. A