THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC IND. INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING IS EXPRESSLY PROHIBITED, EXCEPT AS POSITRONIC IND. INC. MAY OTHERWISE AGREE IN WRITING.

SK10768

DATE	REV	REVISION RECORD	APP	DR	CK
8-25 09	NC	ECO 31056	RCW	BS	TK
3-25 10	A	ECO 32285	COLE	BE	SY

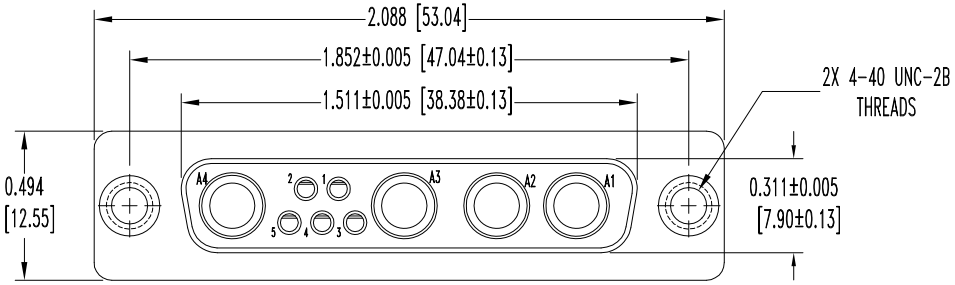

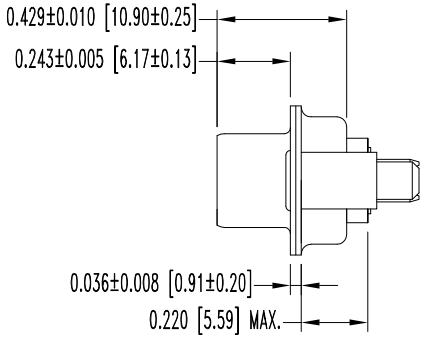

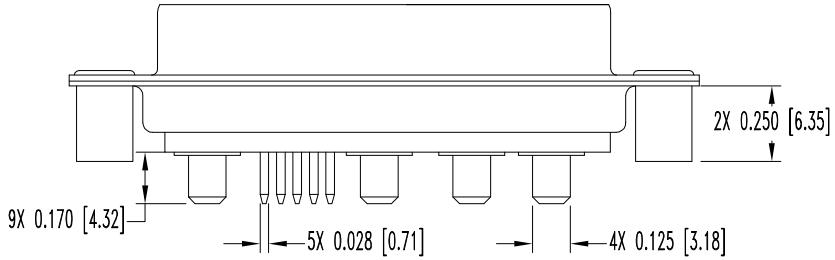

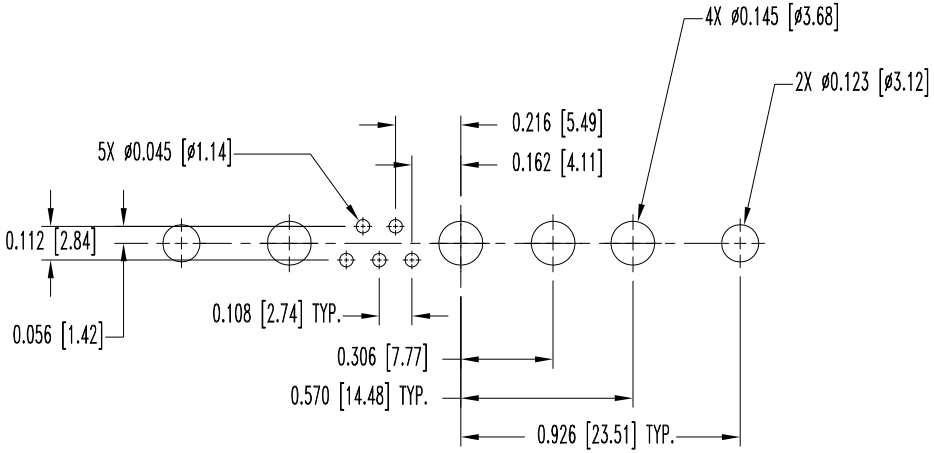

CONTACT HOLE PATTERN

NOTES:

1. MATERIALS AND FINISHES:
   INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, COLOR: BLUE.
   SIGNAL CONTACTS: PRECISION MACHINED COPPER ALLOY WITH BERYLLIUM COPPER CLIP, 0.000050 [1.27μ] GOLD OVER NICKEL PLATE.
   POWER CONTACTS: PRECISION MACHINED COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.
   SHELLS: STAINLESS STEEL, PASSIVATED.
   SPACERS: STAINLESS STEEL, PASSIVATED.
2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY COMBO-D PRODUCT PUBLICATION.
   VISIT CONNECTPOSITRONIC.COM/PRODUCTS/1/STANDARDDENSITYCOMBO-D OR CONNECTPOSITRONIC.COM.
3. DIMENSIONS ARE IN INCHES [MILLIMETERS].

POSITRONIC INDUSTRIES INC.
SPRINGFIELD, MISSOURI 65801

DECIMAL TOL. ±0.015 [0.38]	CBM SERIES	SCALE N.T.S.	DRAWN BY B SHELLEDY / APPROVED BY R WILLIAMS
	TITLE CBM9W4S37S00S		
ANGULAR TOL. ± 5°	DATE 8-25-09	DRAWING NUMBER SK10768	REV. A