

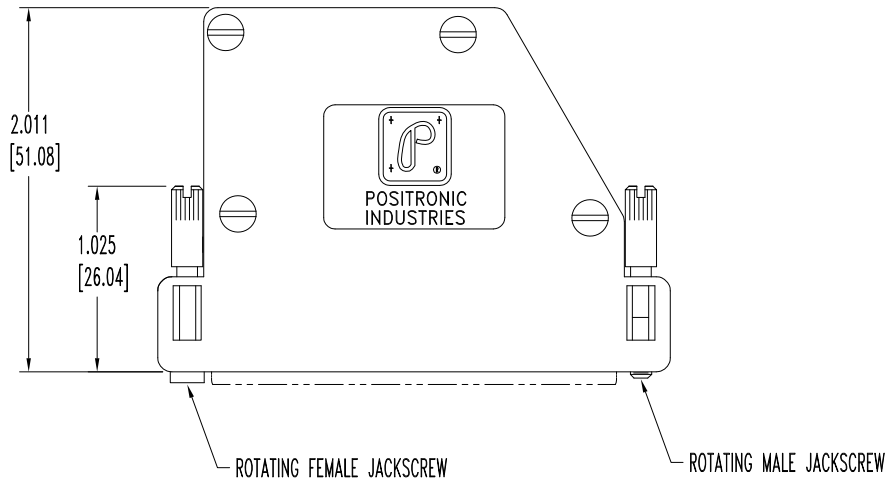


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE. THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
2-23-09	NC	ECO 30676	RCW	ME	TK

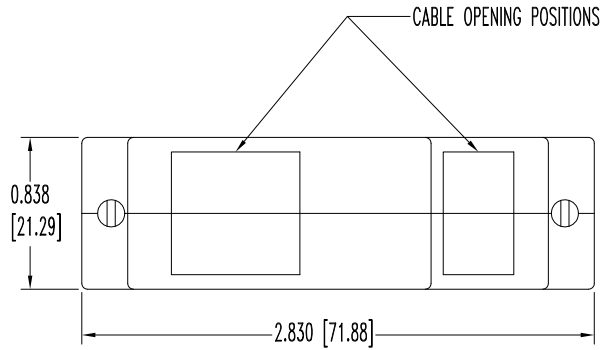

"Y" HOOD

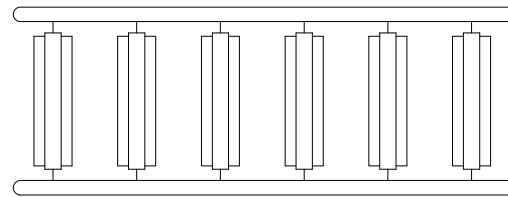

INSERT TREE

NOTES:

- MATERIALS AND FINISHES:  
 HOOD: COMPOSITE, CONDUCTIVE  
 VOLUME RESISTIVITY: (1.0 OHM.-cm MAX.)  
 ATTENUATION: 40+ DECIBELS.  
 JACKSCREWS: STEEL, ZINC PLATE.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

	<b>POSITRONIC INDUSTRIES INC.</b> www.connectpositronic.com		FSCM 28198
	DECIMAL TOL. $\pm 0.015$ [0.38]	D SERIES	SCALE N.T.S.
ANGULAR TOL. $\pm 5^\circ$	TITLE D104000Y600		APPROVED BY R WILLIAMS
DATE 2-23-09	DRAWING NUMBER SK10397	REV. NC	