

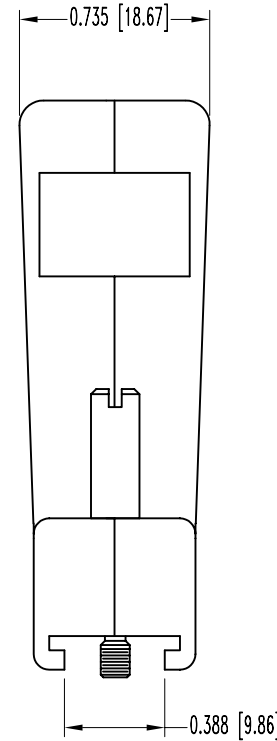
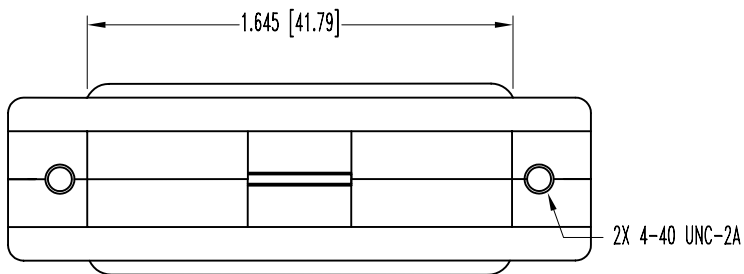


SK6850

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
12-20-05	NC	ECO 25225		YK	

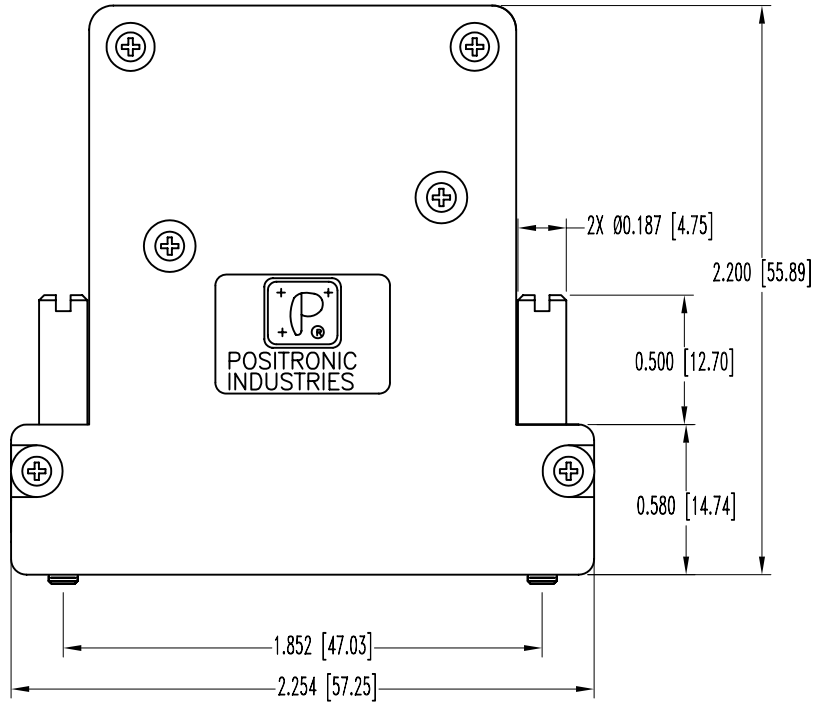


INSERT TREE

INSERTS COME KITTED WITH HOODS.

NOTES:

- MATERIAL: HOOD - COMPOSITE, CONDUCTIVE VOLUME RESISTIVITY (1.0 OHM-CM MAX.), UL94V-0.  
ATTENUATION: 40+ DECIBELS.  
JACKSCREWS: STEEL, ZINC PLATE WITH BLUE CHROMATE SEAL.  
CABLE CLAMPS: STEEL, NICKEL PLATE.  
CABLE CLAMP SCREWS: BRASS, ZINC PLATE WITH CHROMATE SEAL.  
COVER SCREWS: STAINLESS STEEL, PASSIVATED.  
INSERT TREE: PBT(EM), BLACK.
- CONTACTS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF JAN 2003.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

 <b>POSITRONIC INDUSTRIES INC.</b> www.connectpositronic.com		SCALE	DRAWN BY
		N.T.S.	YK
DECIMAL TOL. $\pm 0.015$ [0.38]		TITLE <b>D25000Z00/AA</b>	
DATE <b>12-20-05</b>		DRAWING NUMBER <b>SK6850</b>	REV. <b>NC</b>