


SK4658


POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
9-25-02	NC	ECO 20068		ME	

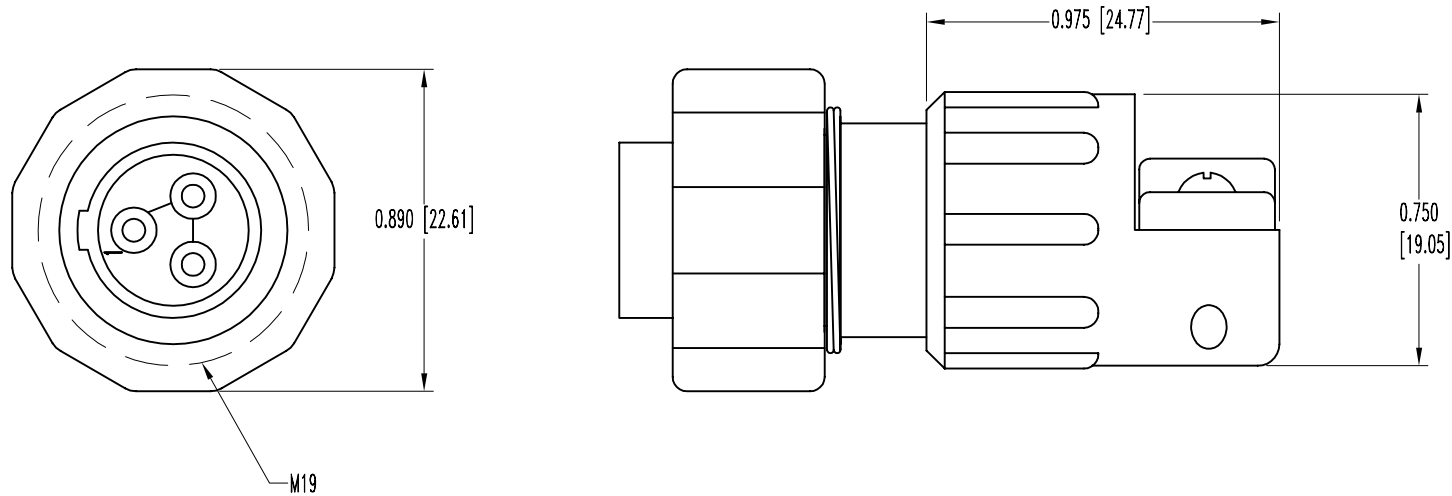

NOTES:

- MATERIAL AND FINISHES:  
 INSULATOR INSERT: GLASS-FILLED DAP, TYPE SDG-F, UL 94V-0, BLACK COLOR.  
 HOUSING: GLASS-FILLED POLYESTER, BLACK COLOR, UL 94-0.  
 COUPLING NUT: GLASS-FILLED POLYESTER, UL 94V-0, BLACK COLOR.
- ELECTRICAL CHARACTERISTICS:  
 INSULATOR RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3a, METHOD A.  
 WORKING VOLTAGE: 300V RMS.  
 CREEPAGE: 0.063 [1.6] MINIMUM CREEPAGE.
- WORKING TEMPERATURE: -55°C TO +125°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

 <b>POSITRONIC INDUSTRIES INC.</b> www.connectpositronic.com			
 DECIMAL TOL. ± 0.015 [0.38]	<b>FRONT RUNNER SERIES</b>	SCALE N.T.S.	DRAWN BY M.ENEA
WF # 4824	TITLE <b>FR11MP316K2</b>		
ANGULAR TOL. ± 5°	DATE 9-25-02	DRAWING NUMBER SK4658	REV. NC