
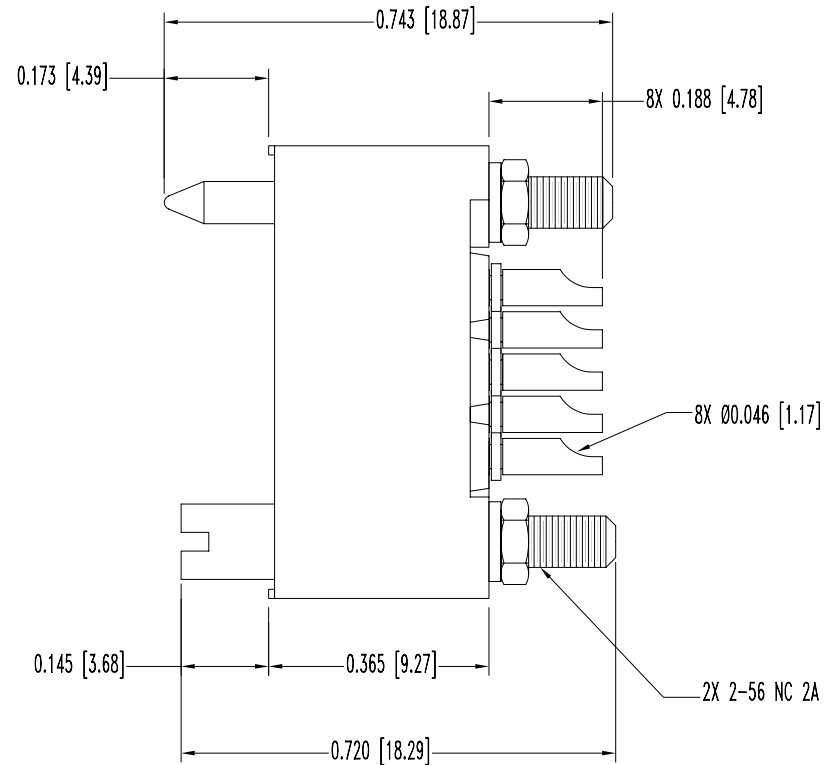


SK8840

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
8-8-07	NC	ECO 28295	TK	YK	COLE

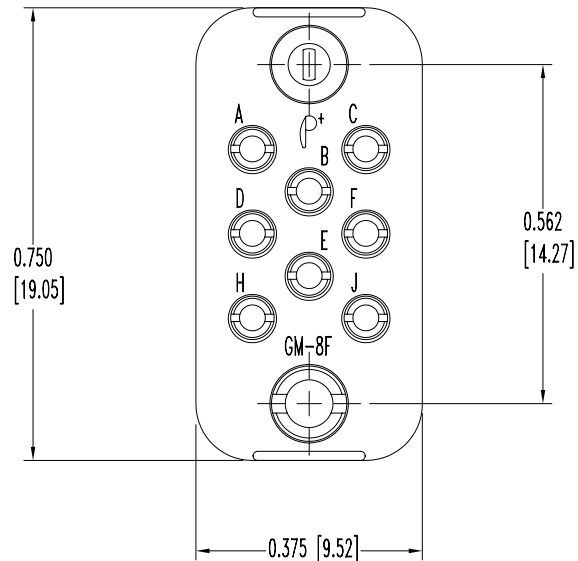

NOTES:

- MATERIALS AND FINISHES:  
 INSULATOR: GLASS FILLED DAP PER ASTM-D-5948 TYPE SDG-F, COLOR, GREY.  
 CONTACTS: COPPER ALLOY, GOLD FLASH OVER NICKEL FINISH.  
 JACKSCREWS: BRASS, NICKEL PLATE.  
 HEXNUTS AND LOCKWASHERS: STAINLESS STEEL PASSIVATED.
- ELECTRICAL CHARACTERISTICS:  
 CONTACT CURRENT RATING: 7.5 AMPS MAXIMUM.  
 INITIAL CONTACT RESISTANCE: 0.010 OHMS MAXIMUM.  
 INSULATOR RESISTANCE: 5 G OHMS.  
 WORKING VOLTAGE: 300 V.AC [rms].
- WORKING TEMPERATURE: -55°C TO +125°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

	<b>POSITRONIC INDUSTRIES INC.</b> www.connectpositronic.com		FSCM 28198
	DECIMAL TOL. ± 0.015 [0.38]	GM SERIES	SCALE N.T.S.
ANGULAR TOL. ± 5°	DATE 8-8-07	TITLE GM8FSCN0000	APPROVED BY T.KEPLEY
	DRAWING NUMBER SK8840		REV. NC