
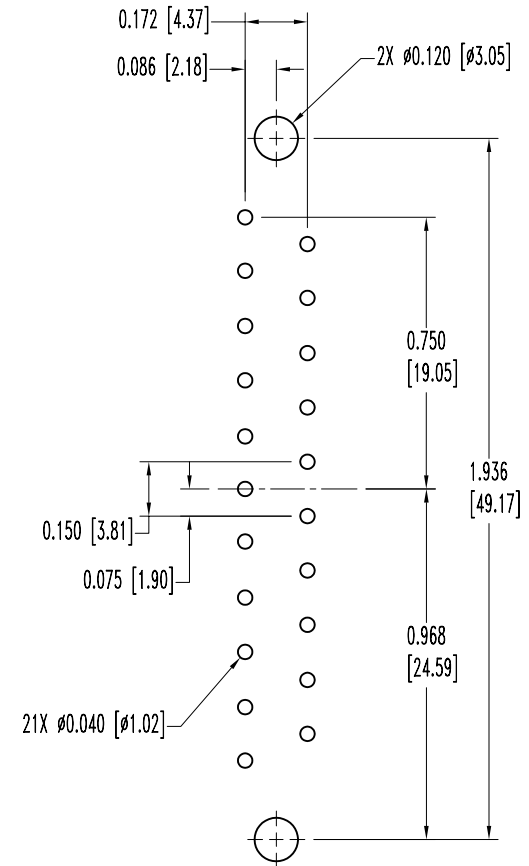
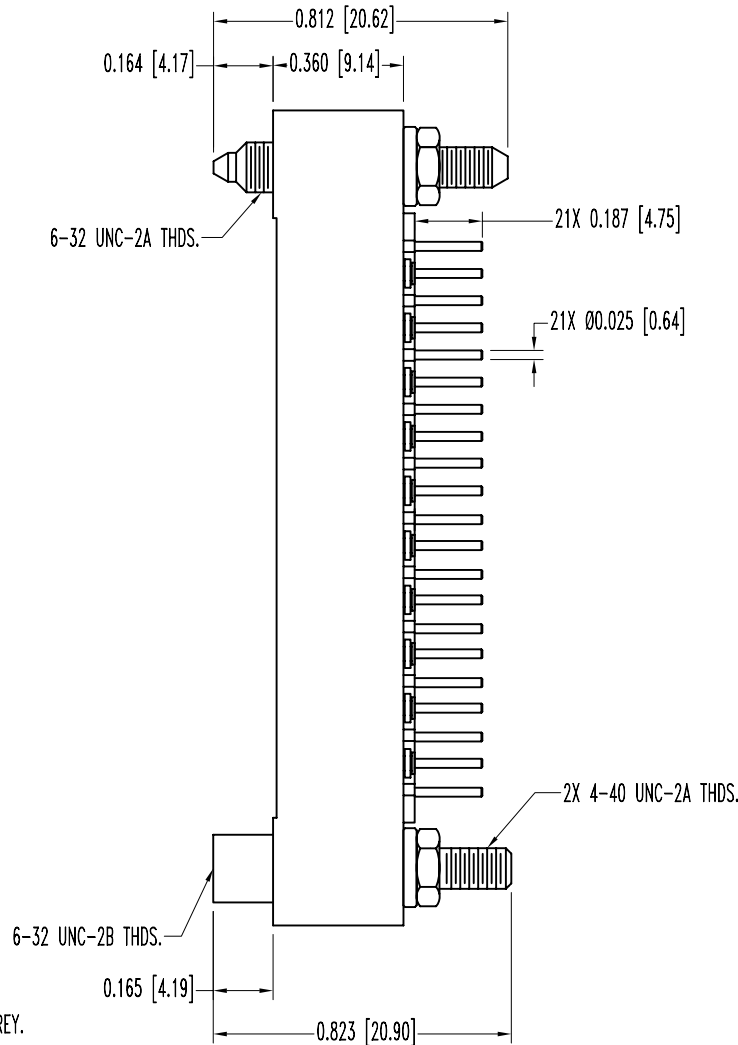


SK5985

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
2-8-05	NC	ECO 23632		ME	

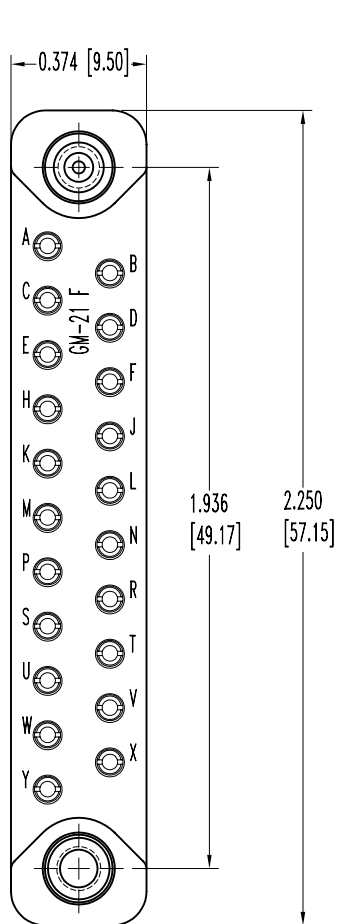

NOTES:

- MATERIALS AND FINISHES:
 INSULATOR: GLASS FILLED DAP PER ASTM-D-5948, TYPE SDG-F, COLOR GREY.
 CONTACTS: COPPER ALLOY, GOLD FLASH OVER NICKEL.
 JACKSCREWS: STAINLESS STEEL, PASSIVATED.
 HEX NUTS: BRASS, ZINC PLATE DICHROMATE SEAL.
 WASHERS: FLAT NYLON.
- ELECTRICAL CHARACTERISTICS:
 CONTACT CURRENT RATING: 7.5 AMPS MAXIMUM.
 INITIAL CONTACT RESISTANCE: 0.010 OHMS MAXIMUM.
 INSULATION RESISTANCE: 5 G OHMS MINIMUM.
 WORKING VOLTAGE: 300 V.A.C (rms).
- WORKING TEMPERATURE: -55°C TO +125°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

		POSITRONIC INDUSTRIES INC. www.connectpositronic.com	
DECIMAL TOL. ± 0.015 [0.38]	GM SERIES	SCALE N.T.S.	DRAWN BY M. ENEA
	TITLE GM21FDS6T0000		
ANGULAR TOL. ± 5°	DATE 2-8-05	DRAWING NUMBER SK5985	REV. NC