


SK7799

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
7-25-06	NC	ECO 26403		ME	

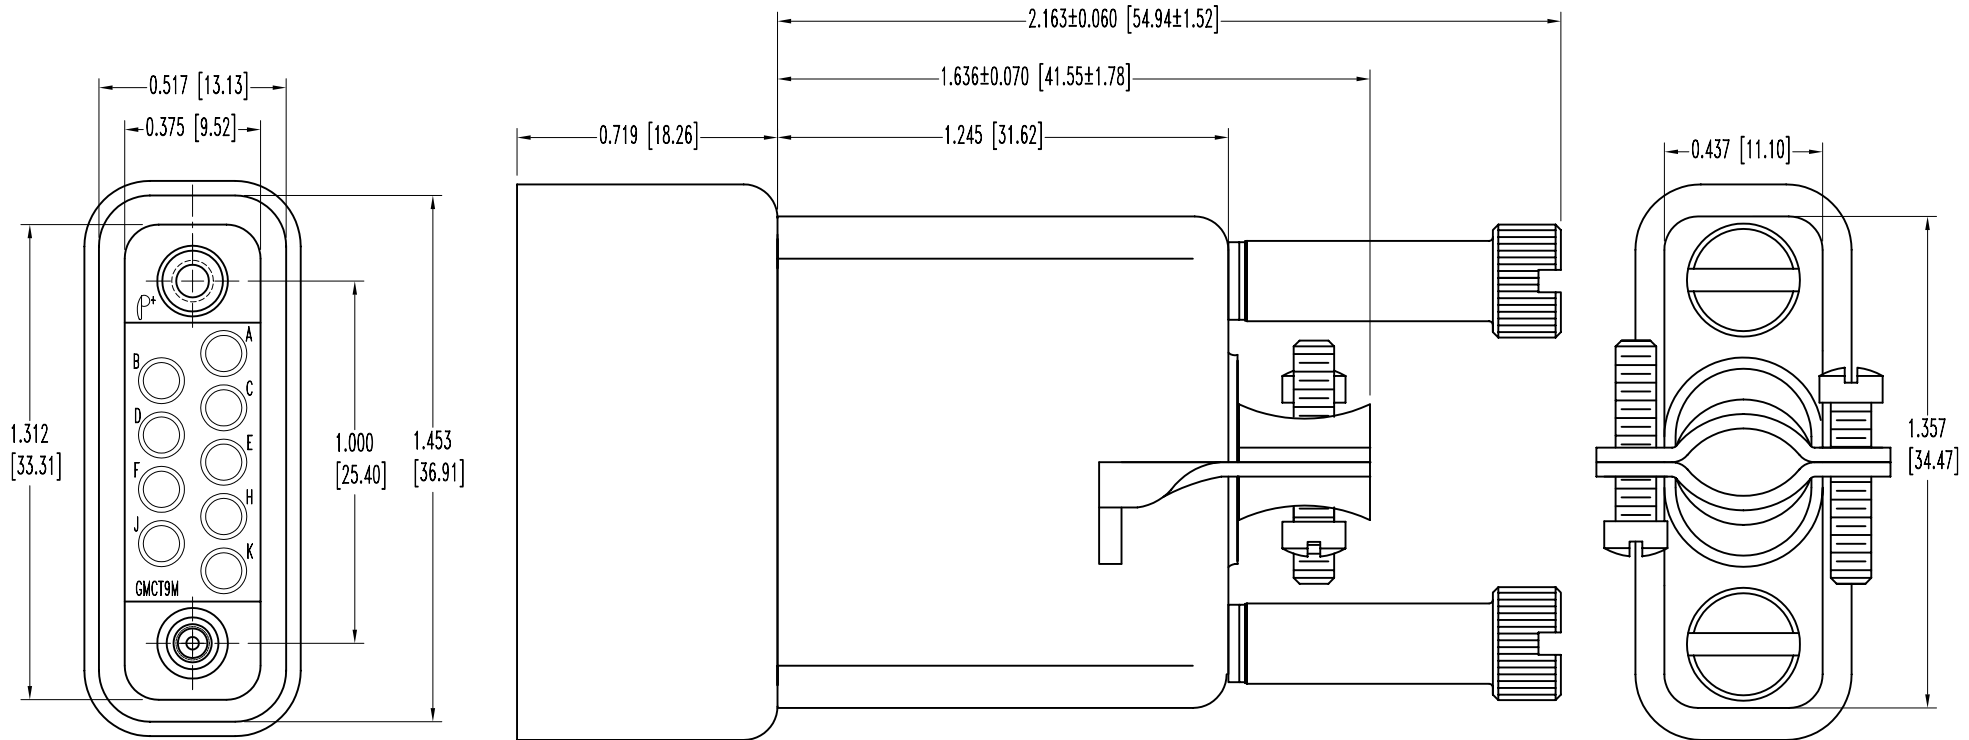

NOTES:

- MATERIALS AND FINISHES:  
 INSULATOR: GLASS FILLED DAP PER ASTM-D-5948 TYPE SDG-F, GREY COLOR.  
 JACKSCREWS: STAINLESS STEEL, PASSIVATED.  
 HOOD: ALUMINUM, YELLOW ANODIZE.  
 SLEEVES AND KNOBS: ALUMINUM, YELLOW ANODIZE.  
 CABLE CLAMPS: ALUMINUM, YELLOW ANODIZE.  
 SCREWS: BRASS, ZINC PLATE WITH DICHROMATE SEAL.  
 SHELL: ALUMINUM, YELLOW ANODIZE.
- ELECTRICAL CHARACTERISTICS:  
 INSULATION RESISTANCE: 5 G OHMS MINIMUM.  
 WORKING VOLTAGE: 500 V.AC (rms).
- WORKING TEMPERATURE: -65°C TO 150°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

		<b>POSITRONIC INDUSTRIES INC.</b> www.connectpositronic.com		
		DECIMAL TOL. ± 0.015 [0.38]	SCALE N.T.S.	DRAWN BY M. ENEA
TITLE GMCT9M0E1R0J0		DATE 7-25-06	DRAWING NUMBER SK7799	REV. NC