
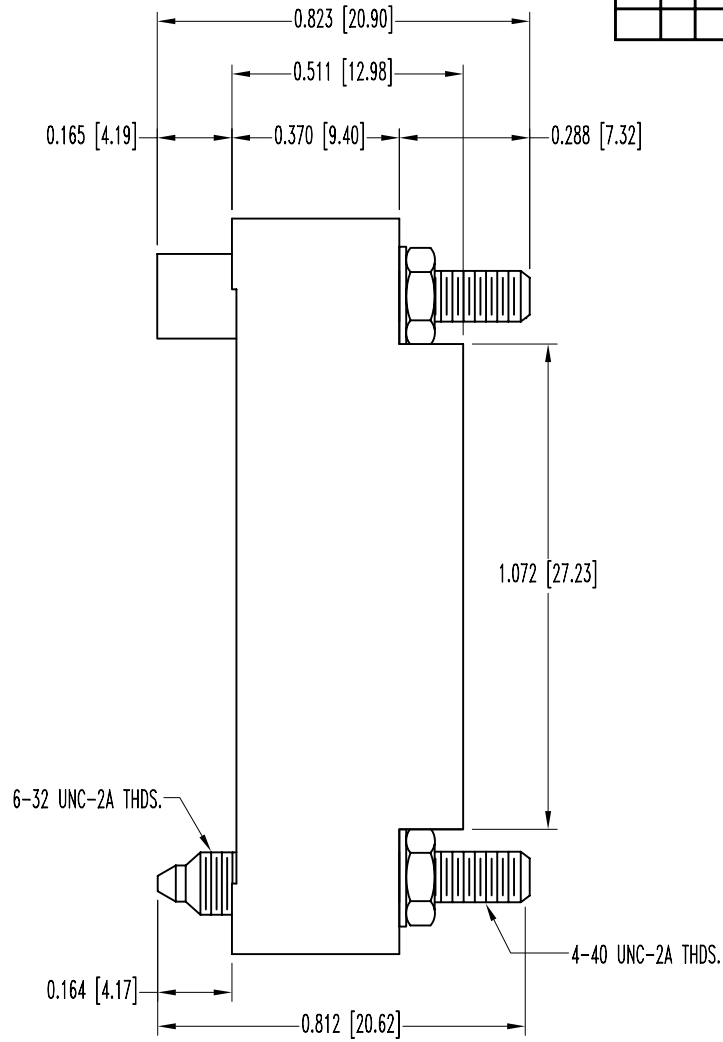


POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
7-1-06	A	ECO 26303		YK	

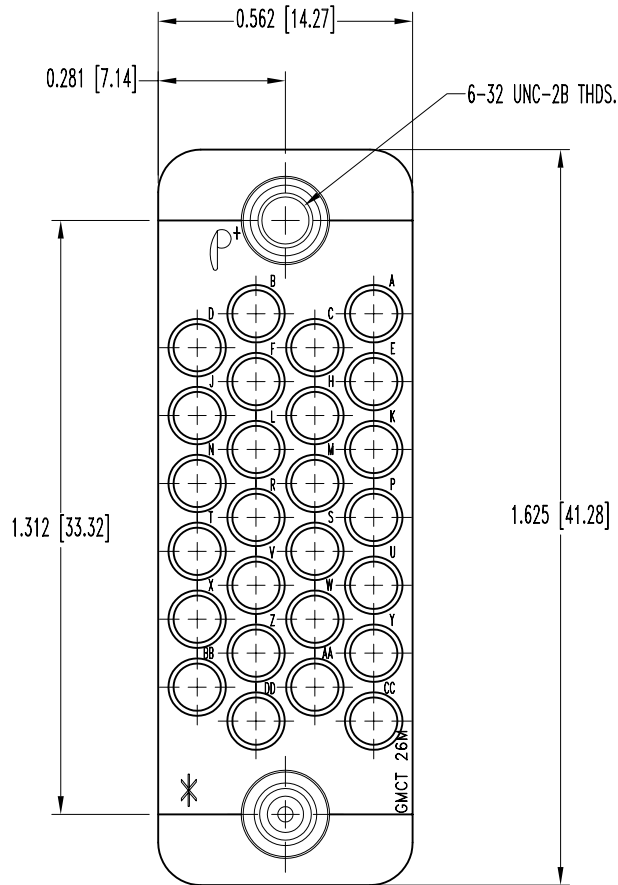

NOTES:

- MATERIALS AND FINISHES:  
 INSULATOR: GLASS FILLED DAP PER ASTM-D-5948 TYPE SDG-F, COLOR GREY.  
 JACKSCREW SYSTEM: PASSIVATED STAINLESS STEEL.  
 LOCKWASHERS: BRONZE, ZINC PLATE WITH CHROMATE SEAL.  
 HEX NUTS: BRASS, ZINC PLATE WITH CHROMATE SEAL.
- ELECTRICAL CHARACTERISTICS:  
 INSULATION RESISTANCE: 5 G OHMS MINIMUM.  
 WORKING VOLTAGE: 500 V.AC (rms).  
 WORKING TEMPERATURE: -65°C TO 150°C.
- CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

 <b>POSITRONIC INDUSTRIES INC.</b> www.connectpositronic.com		SCALE		DRAWN BY	
DECIMAL TOL. ± 0.015 [0.38]		GMCT SERIES		N.T.S.	
ANGULAR TOL. ± 5°		DATE		REV.	
		7-1-06		NC	
TITLE		DRAWING NUMBER		APPROVED BY	
GMCT26M0T0000/AA		SK7696		YK	