
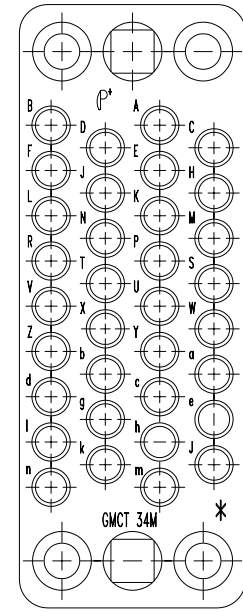
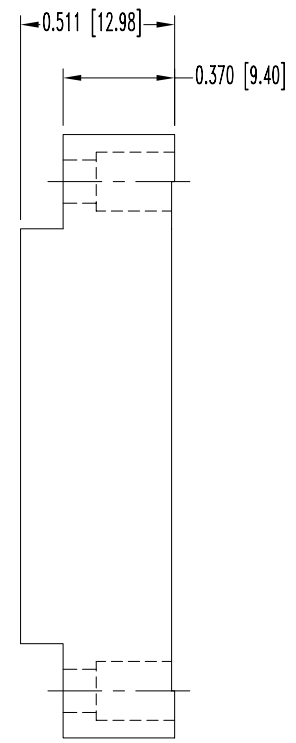


SK8584

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
5-23-07	NC	ECO 27937		YK	

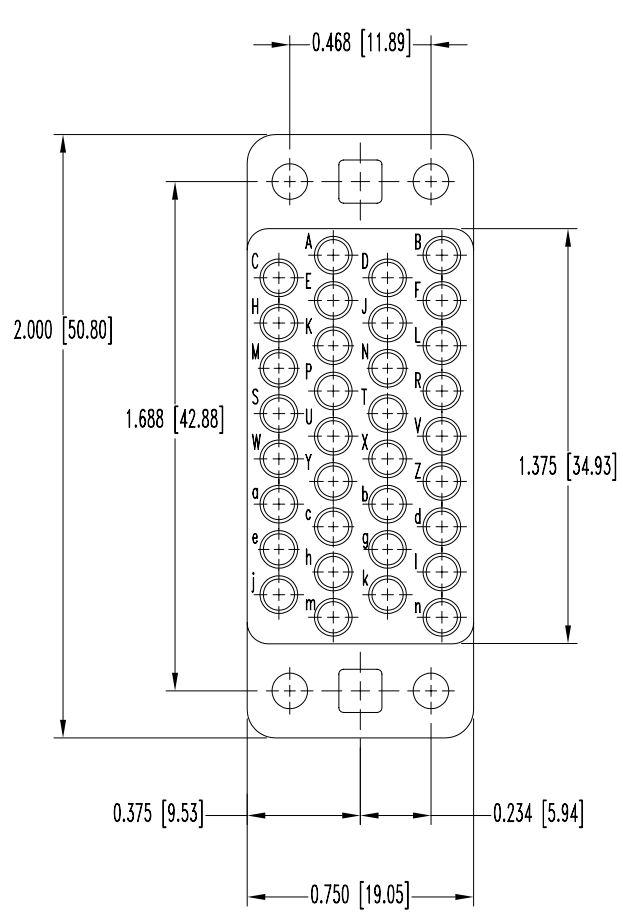

- NOTES:
- MATERIALS AND FINISHES:  
INSULATOR: GLASS FILLED DAP PER ASTM-D-5948 TYPE SDG-F, GREY COLOR.
  - ELECTRICAL CHARACTERISTICS:  
INSULATOR RESISTANCE: 5 G OHMS MINIMUM.
  - WORKING TEMPERATURE: -65°C TO +150°C.
  - DIMENSIONS ARE IN INCHES [MILLIMETERS].

		<b>POSITRONIC INDUSTRIES INC.</b> www.connectpositronic.com		FSCM 28198
		GMCT SERIES TITLE: GMCT34M000000	SCALE: N.T.S. DRAWN BY: YK APPROVED BY:	DATE: 5-23-07 DRAWING NUMBER: SK8584 REV.: NC
DECIMAL TOL. $\pm 0.015$ [0.38]	ANGULAR TOL. $\pm 5^\circ$			