
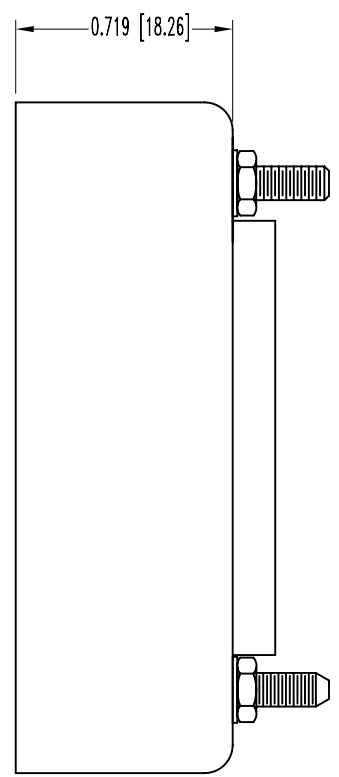


SK6374


POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
7-26 05	NC	ECO 24407	RCW	YK	TK
12-22 06	A	ECO 27230		YK	

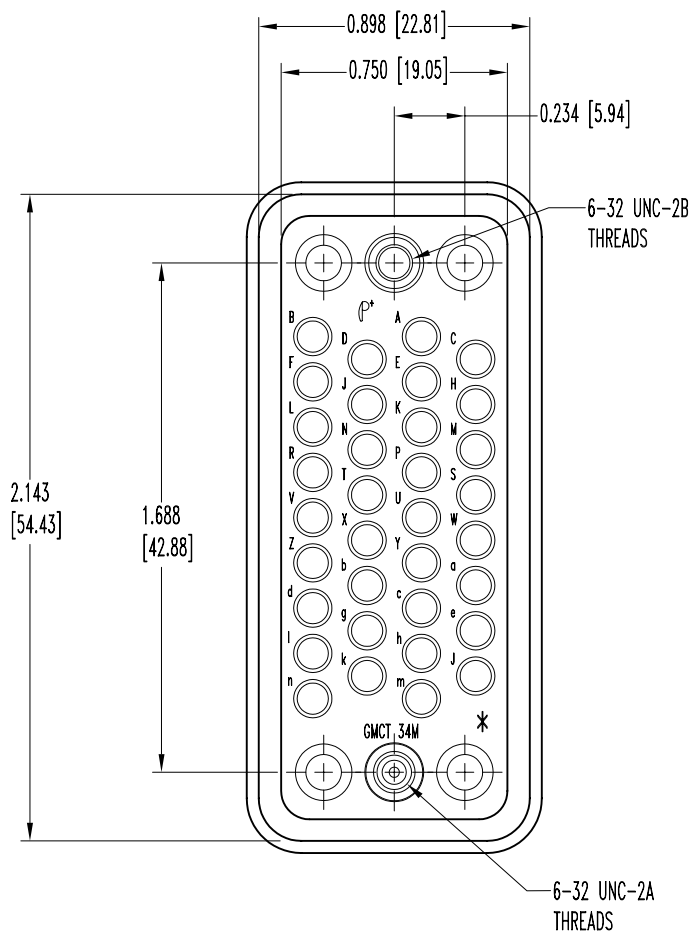

NOTES:

- MATERIALS AND FINISHES:
 INSULATOR: GLASS FILLED DAP PER ASTM-D-5948 TYPE SDG-F, GREY COLOR.
 SHELL: ALUMINUM, YELLOW ANODIZE.
 JACKSCREWS: STAINLESS STEEL, PASSIVATED.
 HEX NUT: BRASS, ZINC PLATE WITH DICHRIMATE SEAL.
 LOCKWASHERS: BRONZE, ZINC PLATE WITH DICHRIMATE SEAL.
- ELECTRICAL CHARACTERISTICS:
 INSULATOR RESISTANCE: 5 G OHMS MINIMUM.
 WORKING TEMPERATURE: -65°C TO +150°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

 POSITRONIC INDUSTRIES INC. www.connectpositronic.com		SCALE	DRAWN BY
		N.T.S.	YK
DECIMAL TOL.	TITLE	APPROVED BY	
± 0.015 [0.38]	GMCT SERIES	RCW	
ANGULAR TOL.	DATE	DRAWING NUMBER	REV.
± 5°	7-26-05	SK6374	A