
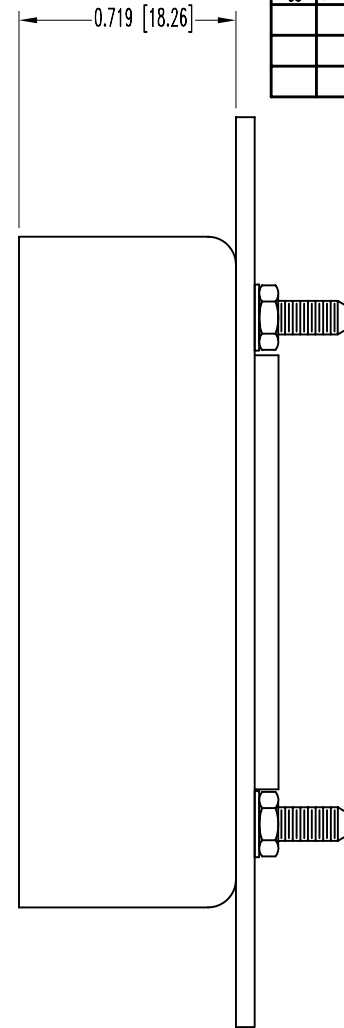


SK6700

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

| DATE    | REV | REVISION RECORD | APP | DR | CK |
|---------|-----|-----------------|-----|----|----|
| 11-7-05 | NC  | ECO 24953       |     | YK |    |
|         |     |                 |     |    |    |
|         |     |                 |     |    |    |

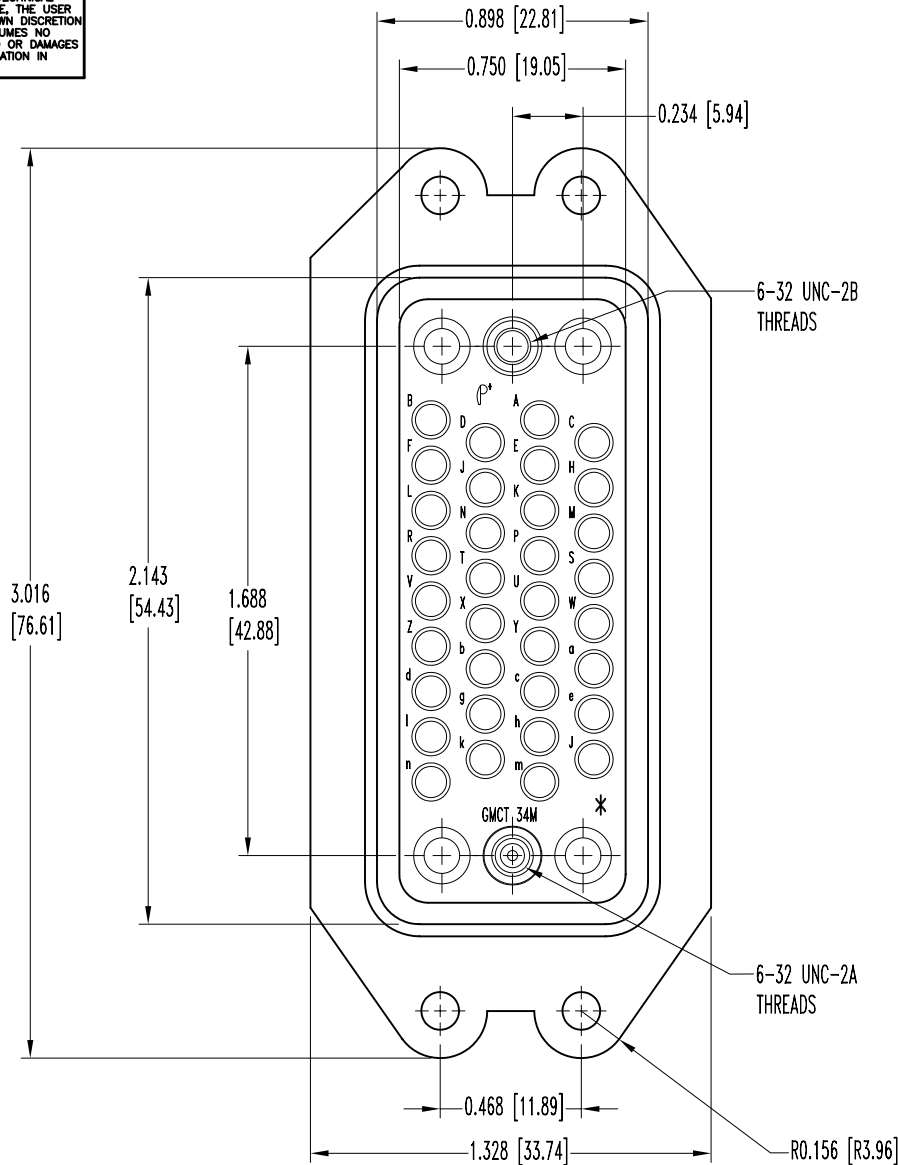

NOTES:

- MATERIALS AND FINISHES:  
 INSULATOR: GLASS FILLED DAP PER ASTM-D-5948 TYPE SDG-F, GREY COLOR.  
 SHELL: ALUMINUM, BLACK ANODIZE.  
 MOUNTING PLATE: ALUMINUM, BLACK ANODIZE.  
 JACKSCREWS: STAINLESS STEEL, PASSIVATED.  
 HEX NUT: BRASS, ZINC PLATE WITH DICHRIMATE SEAL.  
 LOCKWASHERS: PHOSPHOR BRONZE, ZINC PLATE WITH DICHRIMATE SEAL.
- ELECTRICAL CHARACTERISTICS:  
 INSULATOR RESISTANCE: 5 G OHMS MINIMUM.  
 WORKING TEMPERATURE: -65°C TO +150°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

|                                |  |                          |            |          |
|--------------------------------|--|--------------------------|------------|----------|
|                                | <b>POSITRONIC INDUSTRIES INC.</b><br>www.connectpositronic.com |                          | SCALE      | DRAWN BY |
|                                | GMCT SERIES  |                          | N.T.S.     | YK       |
| DECIMAL TOL.<br>± 0.015 [0.38] | TITLE<br><b>GMCT34M0TW00B</b>                                  |                          |            |          |
| ANGULAR TOL.<br>± 5°           | DATE<br>11-7-05  | DRAWING NUMBER<br>SK6700 | REV.<br>NC |          |