
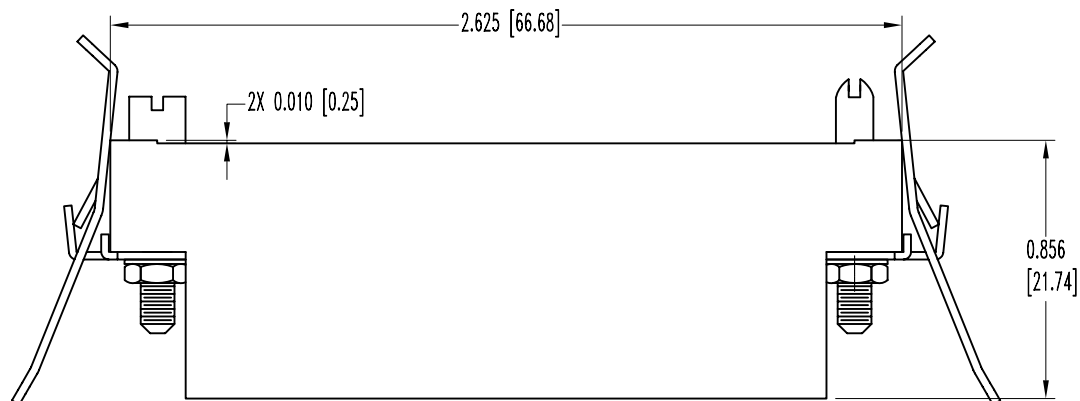


SK5721

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
10-8-04	NC	ECO 23105		ME	

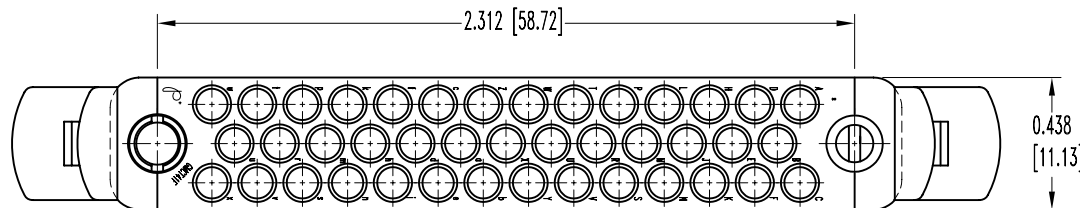

NOTES:

- MATERIALS AND FINISHES:
 INSULATOR: GLASS FILLED DAP PER ASTM-D-5948 TYPE SDG-F, GREY COLOR.
 POLARIZING GUIDES: BRASS, NICKEL PLATE.
 VIBRATION LOCK PIVOT: BRASS, ZINC PLATE AND DICHROMATE SEAL.
 VIBRATION LOCK LEVER: PHOSPHOR BRONZE, ZINC PLATE AND DICHROMATE SEAL.
- ELECTRICAL CHARACTERISTICS:
 INSULATION RESISTANCE: 5 G OHMS MINIMUM.
 WORKING VOLTAGE: 500 V.AC (rms).
- WORKING TEMPERATURE: -65°C TO 150°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

 POSITRONIC INDUSTRIES INC. www.connectpositronic.com		SCALE N.T.S.		DRAWN BY M. ENEA	
DECIMAL TOL. ± 0.015 [0.38]		GMCT SERIES		APPROVED BY	
		TITLE GMCT41F0N000VL			
ANGULAR TOL. ± 5°		DATE 10-8-04		DRAWING NUMBER SK5721	
				REV. NC	