
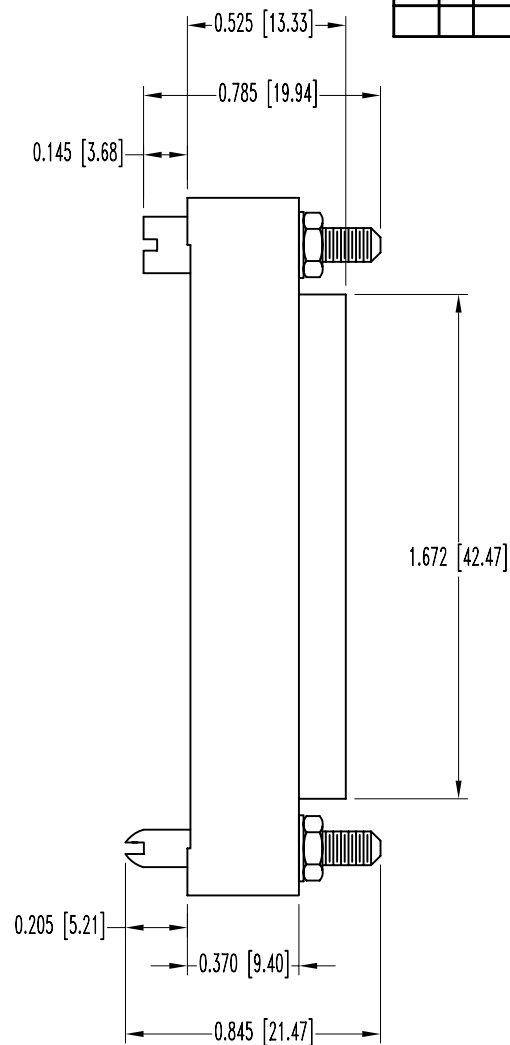


SK7144

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
3-15-06	NC	ECO 25651		YK	

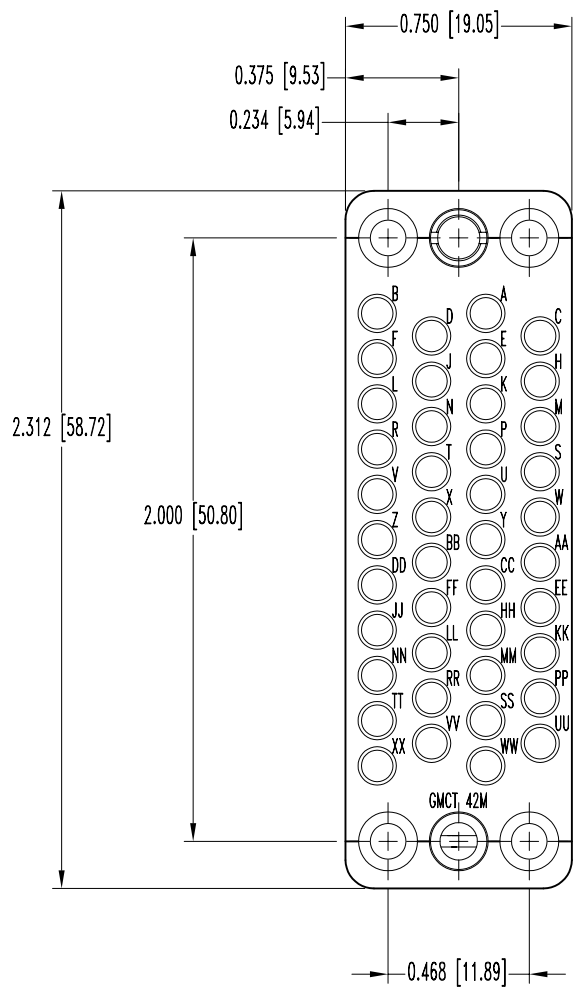

NOTES:

- MATERIALS AND FINISHES:
 INSULATOR: GLASS FILLED DAP PER MIL-M-14, TYPE SDG-F, GREY COLOR.
 GUIDE SYSTEM: BRASS, NICKEL PLATE.
 HEXNUTS: BRASS, ZINC PLATE WITH DICHROMATE SEAL.
 LOCKWASHERS: BRONZE, ZINC PLATE WITH DICHROMATE SEAL.
- ELECTRICAL CHARACTERISTICS:
 INSULATION RESISTANCE: 5 G OHMS MINIMUM.
 WORKING TEMPERAURE: -65°C TO +150°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

 POSITRONIC INDUSTRIES INC. www.connectpositronic.com		SCALE		DRAWN BY	
DECIMAL TOL. ± 0.015 [0.38]		GMCT SERIES		N.T.S.	
ANGULAR TOL. ± 5°		DATE 3-15-06		DRAWING NUMBER SK7144	
TITLE GMCT42M0N0000		APPROVED BY		YK	
		REV.		NC	