
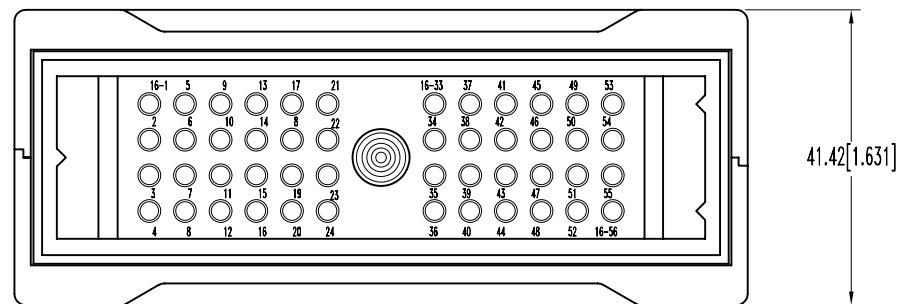


SK2853

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
5-20-97	NC	ECO 11882	RCW	MS	MZ
3-10-00	A	ECO 16115		ME	

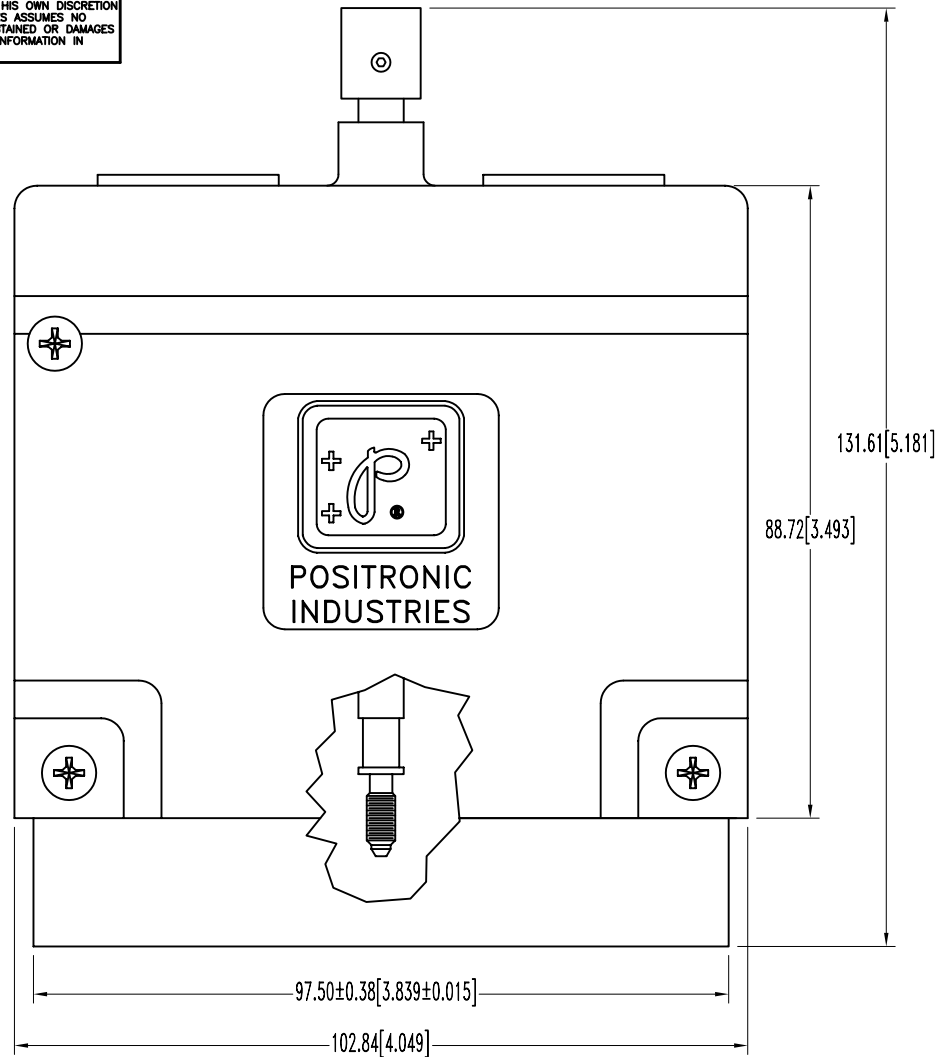

NOTES:

- MATERIALS AND FINISHES:
 INSULATOR: GLASS-FILLED POLYESTER, UL 94V-0, BLUE COLOR.
 CABLE ADAPTER: GLASS-FILLED POLYESTER, UL 94V-0, BLUE COLOR.
 CONTACTS ORDERED SEPARATELY.
 SCREWS: STEEL, ZINC PLATE.
 JACKSCREWS: STAINLESS STEEL, PASSIVATED. KNOBS ARE ALUMINUM WITH BLACK ANODIZED COATING.
- ELECTRIC CHARACTERISTICS:
 INSULATOR RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3a.
- MECHANICAL CHARACTERISTICS:
 POLARIZATION: PROVIDED BY CONNECTOR DESIGN.
- CLIMATIC CHARACTERISTICS:
 WORKING TEMPERATURE: -55°C TO 125°C.
- DIMENSIONS ARE IN MILLIMETERS [INCHES].

 POSITRONIC INDUSTRIES INC. www.connectpositronic.com		SCALE	DRAWN BY
		INFINITY SERIES	M. SNOW
DECIMAL TOL.	TITLE	APPROVED BY	REV.
± 0.51 [0.020]	IP48MOJELO	RCW	A
WF # 23193	DATE	DRAWING NUMBER	
ANGULAR TOL.	5-20-97	SK2853	
± 5°			