

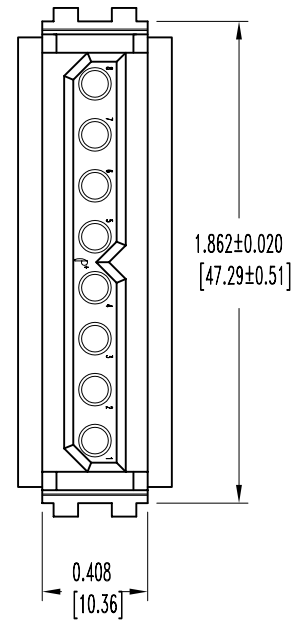



SK8307

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
1-31-07	NC	ECO			

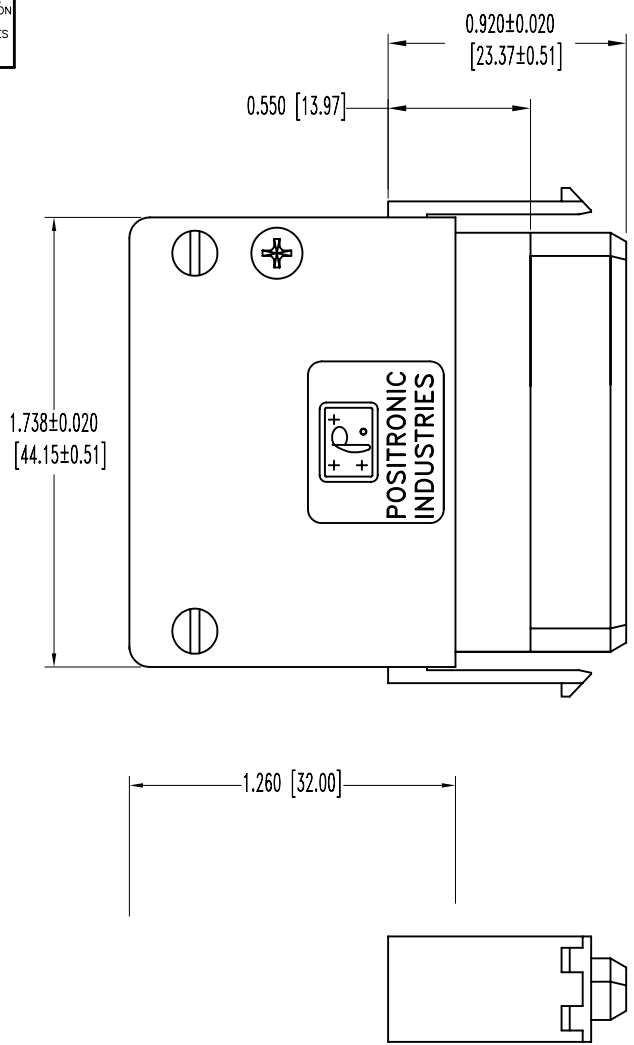

- D POLYESTER, UL 94V-0, BLUE COLOR.
- HOOD: GLASS FILLED POLYESTER, UL 94 V-0, COLOR BLUE.
- HOOD SCREWS: STEEL, ZINC PLATE CHROMATE SEAL.
- CABLE CLAMP: STEEL, NICKEL PLATE.
- CABLE CLAMP SCREWS: BRASS, ZINC PLATE WITH CHROMATE SEAL.
- 2. ELECTRICAL CHARACTERISTICS:
 - INSULATION RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3a, METHOD A.
 - WORKING VOLTAGE: 600 VAC.
- 3. WORKING TEMPERATURE: -55°C TO +125°C.
- 4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

	POSITRONIC INDUSTRIES INC. www.connectpositronic.com		SCALE	DRAWN BY
	PCS SERIES		N.T.S.	YK
DECIMAL TOL. ± 0.015 [0.38]	TITLE PLA08F0050			
ANGULAR TOL. ± 5°	DATE 1-31-07	DRAWING NUMBER SK8307	REV. NC	APPROVED BY