
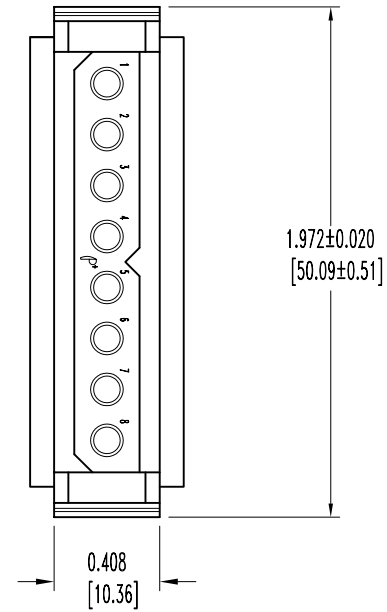


POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

| DATE | REV | REVISION RECORD | APP | DR | CK |
|---------|-----|-----------------|-----|----|----|
| 1-31-07 | NC | ECO 27413 | | YK | |
| | | | | | |
| | | | | | |

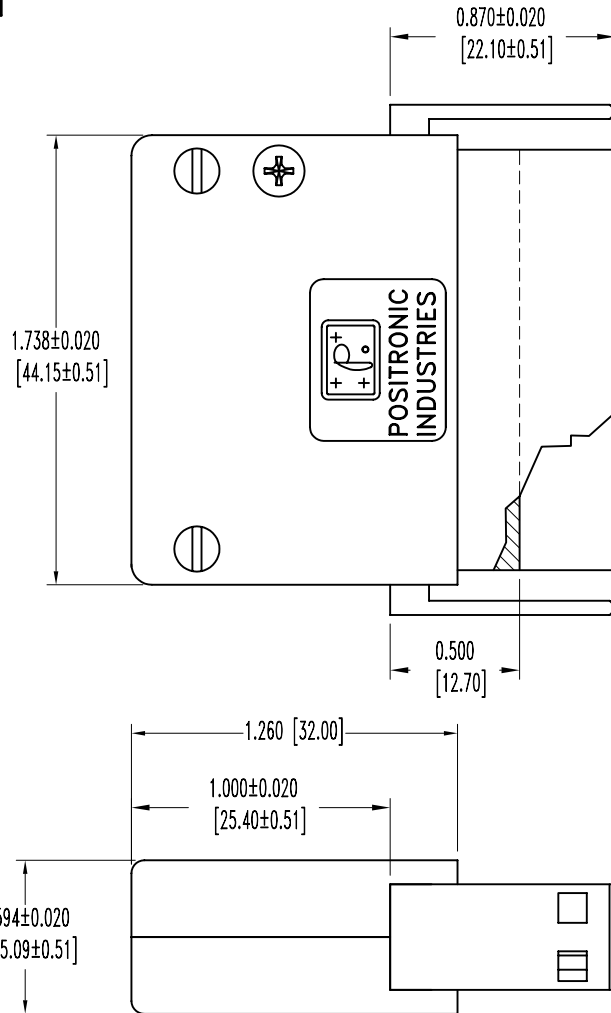

NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS-FILLED POLYESTER, UL 94V-0, BLUE COLOR.

HOOD: GLASS FILLED POLYESTER, UL 94 V-0, COLOR BLUE.

HOOD SCREWS: STEEL, ZINC PLATE CHROMATE SEAL.

CABLE CLAMP: STEEL, NICKEL PLATE.

CABLE CLAMP SCREWS: BRASS, ZINC PLATE WITH CHROMATE SEAL.

2. ELECTRICAL CHARACTERISTICS:

INSULATION RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3a, METHOD A.

WORKING VOLTAGE: 600 VAC.

3. WORKING TEMPERATURE: -55°C TO +125°C.

4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

| | | | | |
|---|--|--------------------------|-------------|----------|
|  | POSITRONIC INDUSTRIES INC. www.connectpositronic.com | | SCALE | DRAWN BY |
| | PCS SERIES | | N.T.S. | YK |
| DECIMAL TOL. ± 0.015 [0.38] | TITLE PLA08M0050 | | APPROVED BY | |
| ANGULAR TOL. ± 5° | DATE 1-31-07 | DRAWING NUMBER SK8308 | REV. NC | |