
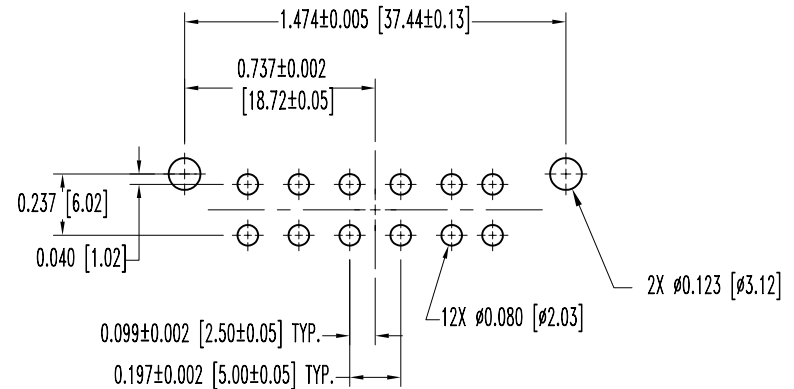
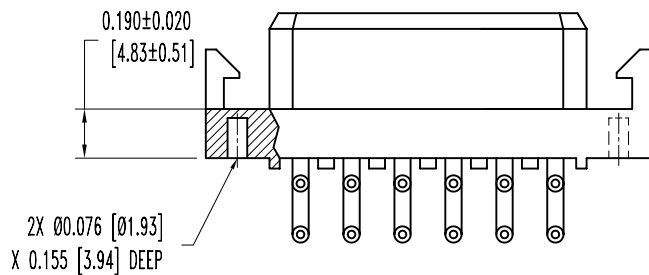
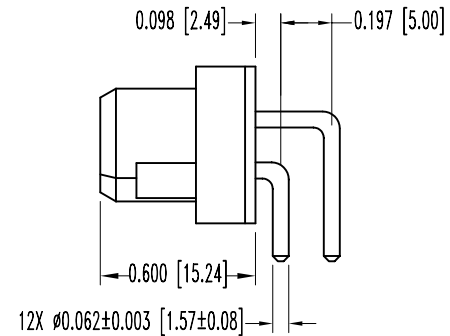


SK3770

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
5-24-01	NC	ECO 17793	RCW	ME	JG
7-6-06	A	ECO 26317		ME	

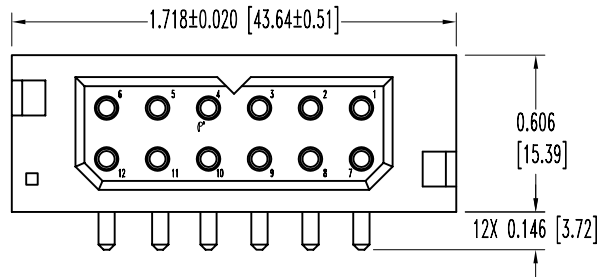

CONTACT HOLE PATTERN

NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS FILLED POLYESTER. UL 94V-0. COLOR BLUE.

CONTACTS: COPPER ALLOY WITH GOLD FLASH OVER NICKEL ON MATING END AND 0.00020 [5.0µ] SOLDER COAT ON TERMINATION END.

2. ELECTRICAL CHARACTERISTICS:

CONTACT CURRENT RATING: 25 AMPS PER UL 1977.

INITIAL CONTACT RESISTANCE: 0.0016 OHMS MAX. PER IEC 512-2, TEST 2b.

INSULATOR RESISTANCE: 5 G OHMS. PER IEC 512-2,

TEST 3a, METHOD A.

WORKING VOLTAGE: 600 VAC.

3. WORKING TEMPERATURE: -55°C TO +125°C.

4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

	POSITRONIC INDUSTRIES INC. www.connectpositronic.com		SCALE	DRAWN BY
	PCS SERIES		N.T.S.	M. ENEA
DECIMAL TOL. ± 0.015 [0.38]	TITLE PLB12F400A2		APPROVED BY	RCW
ANGULAR TOL. ± 5°	DATE	DRAWING NUMBER	REV.	
	5-24-01	SK3770	A	