
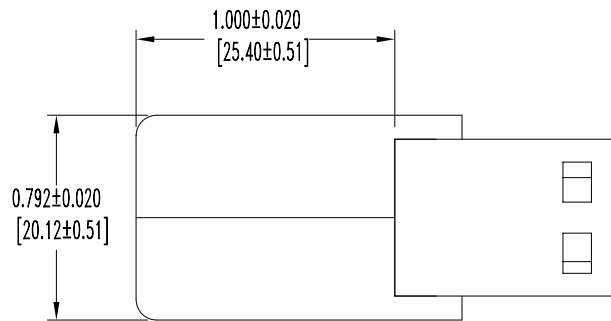
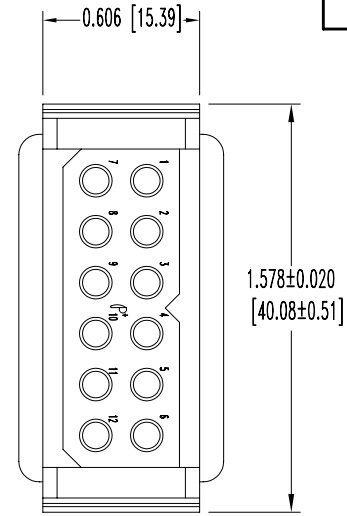


SK8860

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
8-17-07	NC	ECO 28336	rcw	YK	COLE

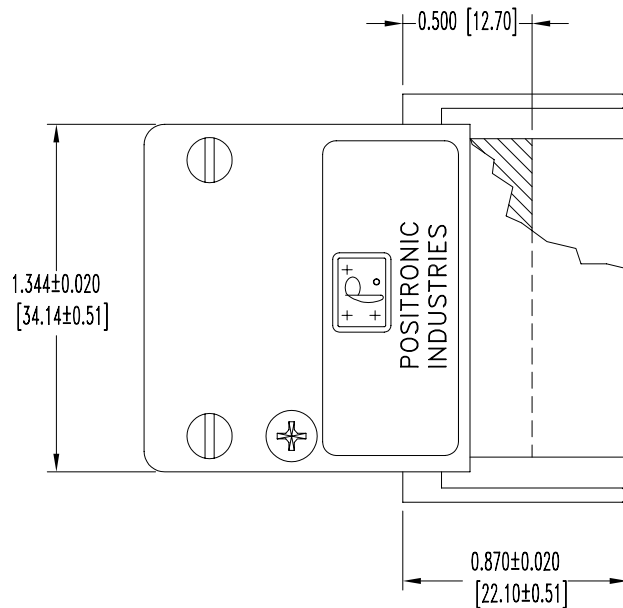

NOTES:

- MATERIALS AND FINISHES:  
 INSULATOR: GLASS FILLED POLYESTER, UL 94V-0. COLOR BLUE.  
 HOOD: GLASS FILLED POLYESTER, UL 94V-0, COLOR BLUE.  
 SCREWS: STEEL, ZINC PLATE WITH CHROMATE SEAL.  
 CABLE CLAMP: STEEL, NICKEL PLATE.  
 CABLE CLAMP SCREWS: STEEL, ZINC PLATE WITH CHROMATE SEAL.
- ELECTRICAL CHARACTERISTICS:  
 INSULATOR RESISTANCE: 5 G. OHMS. PER IEC 512-2, TEST 3a.
- TEMPERATURE RANGE: -55°C TO 125°C.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

	<b>POSITRONIC INDUSTRIES INC.</b> www.connectpositronic.com		FSCM 28198
	DECIMAL TOL. ± 0.015 [0.38]	PCS SERIES	SCALE N.T.S.
ANGULAR TOL. ± 5°	DATE 8-17-07	DRAWING NUMBER SK8860	REV. NC
TITLE <b>PLB12M0050</b>			
		APPROVED BY rcw	