
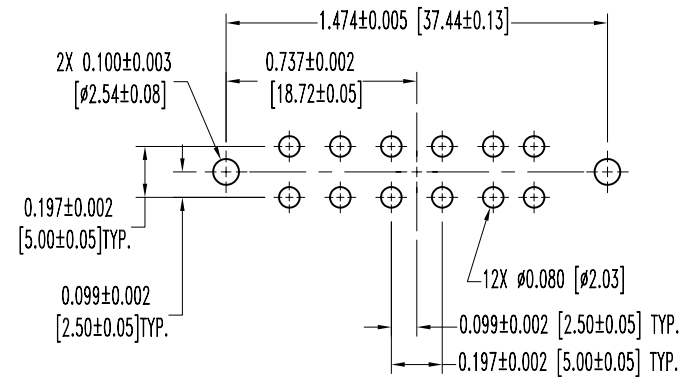
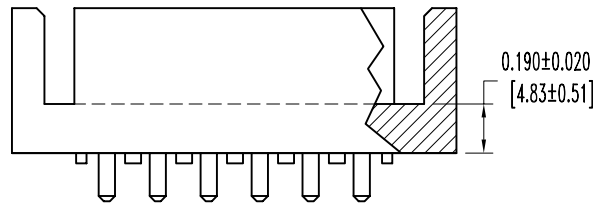
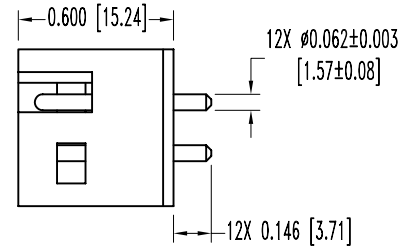


SK3131

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
4-27-99	NC	ECO 15008	RCW	MS	COLE
4-21-06	A	ECO 25857		ME	

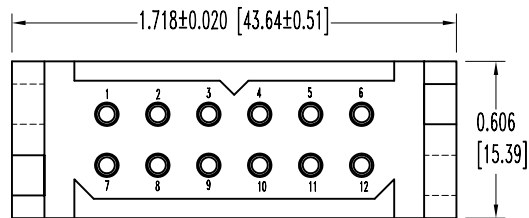

CONTACT HOLE PATTERN

NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS FILLED POLYESTER. UL 94V-0, COLOR BLUE.

CONTACTS: PRECISION MACHINED COPPER ALLOY, GOLD FLASH OVER NICKEL.

2. ELECTRICAL CHARACTERISTICS:

CONTACT CURRENT RATING: 25 AMPS PER UL 1977.

INITIAL CONTACT RESISTANCE: 0.0016 OHMS MAX. PER IEC 512-2, TEST 2b.

INSULATOR RESISTANCE: 5 G OHMS. PER IEC 512-2.

TEST 3a. METHOD A.

WORKING VOLTAGE: 600 VAC.

3. TEMPERATURE RANGE: -55°C TO +125°C.

4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

	POSITRONIC INDUSTRIES INC. www.connectpositronic.com		SCALE	DRAWN BY
	PCS SERIES		N.T.S.	M. SNOW
DECIMAL TOL. ± 0.015 [0.38]	TITLE PLB12M300A1		APPROVED BY	RCW
ANGULAR TOL. $\pm 5^\circ$	DATE	DRAWING NUMBER	REV.	
	4-27-99	SK3131	A	