
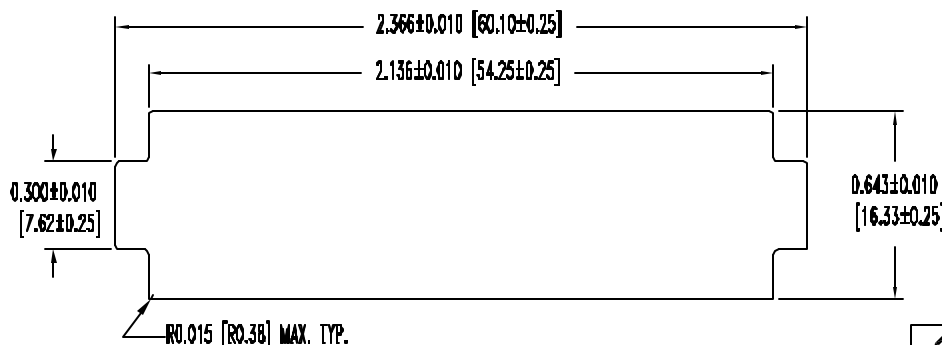



POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYEES SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK3854

DATE	REV	REVISION RECORD	APP	DR	CK
7-23-01	NC	ECO 18065		ME	

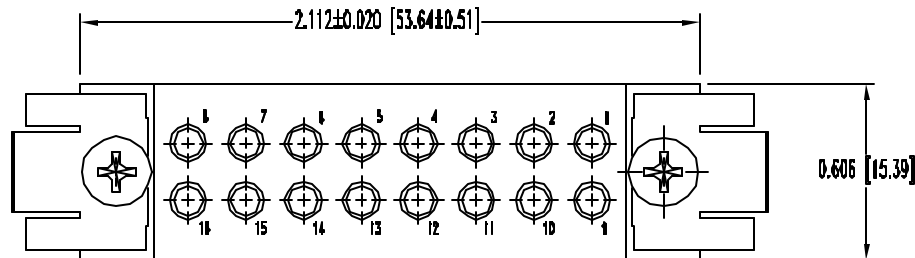

NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS FILLED POLYESTER, UL 94V-0.  
 SPRING CLIP: BERYLLIUM COPPER, TIN PLATED.

2. ELECTRICAL CHARACTERISTICS:

INSULATOR RESISTANCE: - 5 G OHMS, PER IEC 512-2,  
 TEST 3a, METHOD A.

TEMPERATURE RANGE: -55°C TO +125°C.

3. DIMENSIONS ARE IN INCHES [MILLIMETERS].

PANEL CUTOUT



**POSITRONIC INDUSTRIES INC.**  
 www.connectpositronic.com



DECIMAL TOL.  
 ± 0.015 [0.38]

WT # 3812

ANGULAR TOL.  
 ± 5°

PCS SERIES

TITLE

DATE  
 7-23-01

DRAWING NUMBER  
 SK3854

SCALE  
 N.T.S.

DRAWN BY  
 M. ENBA

APPROVED BY

PLB16M10820

REV.  
 NC