

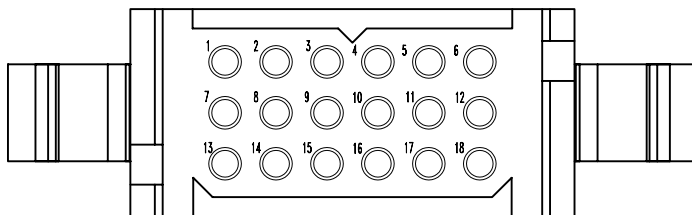
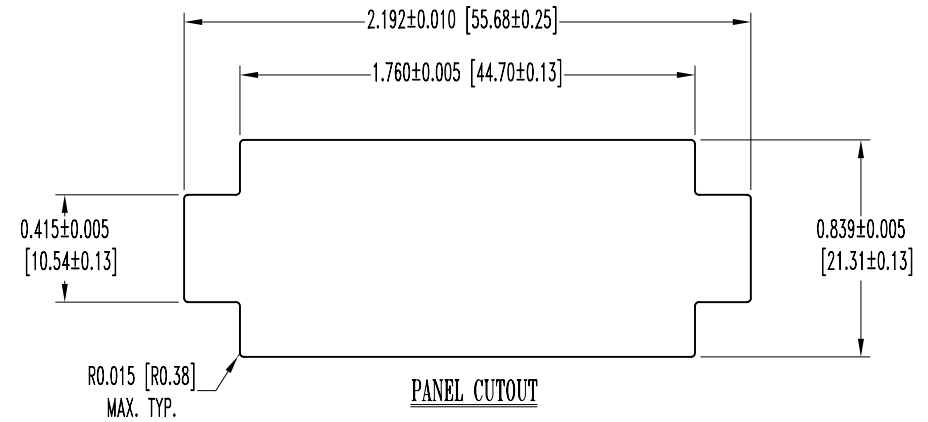


SK8247

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
12-27-06	NC	ECO 27231		YK	

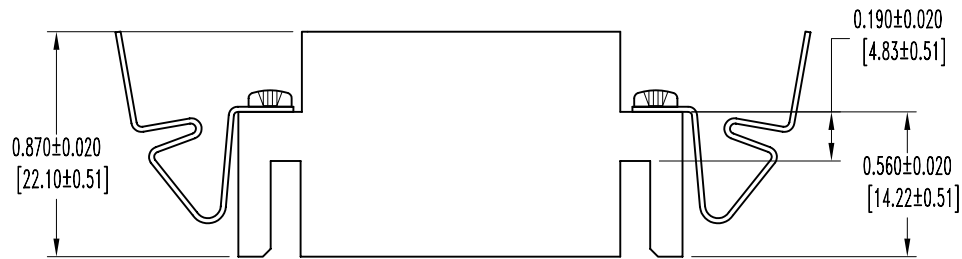

NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS-FILLED POLYESTER, UL 94V-0, BLUE COLOR.
 MOUNTING CLIPS: BERYLLIUM COPPER WITH NICKEL PLATE.
 SCREWS: STEEL, ZINC PLATE WITH BLUE CHROMATE SEAL.

2. ELECTRICAL CHARACTERISTICS:

INSULATION RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3a, METHOD A.
 VOLTAGE PROOF: 2,000 V rms PER IEC 512-2, TEST 4a, METHOD C.

3. WORKING TEMPERATURE: -55°C TO +125°C.

4. CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.

5. DIMENSIONS ARE IN INCHES [MILLIMETERS].

		POSITRONIC INDUSTRIES INC. www.connectpositronic.com	
	PCS SERIES	SCALE N.T.S.	DRAWN BY YK
DECIMAL TOL. ± 0.015 [0.38]	TITLE PLC18M1060/AA		
ANGULAR TOL. ± 5°	DATE 12-27-06	DRAWING NUMBER SK8247	REV. NC