


SK9397

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOY'S SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
4-28-08	NC	ECO 29335	RCW	YK	TK

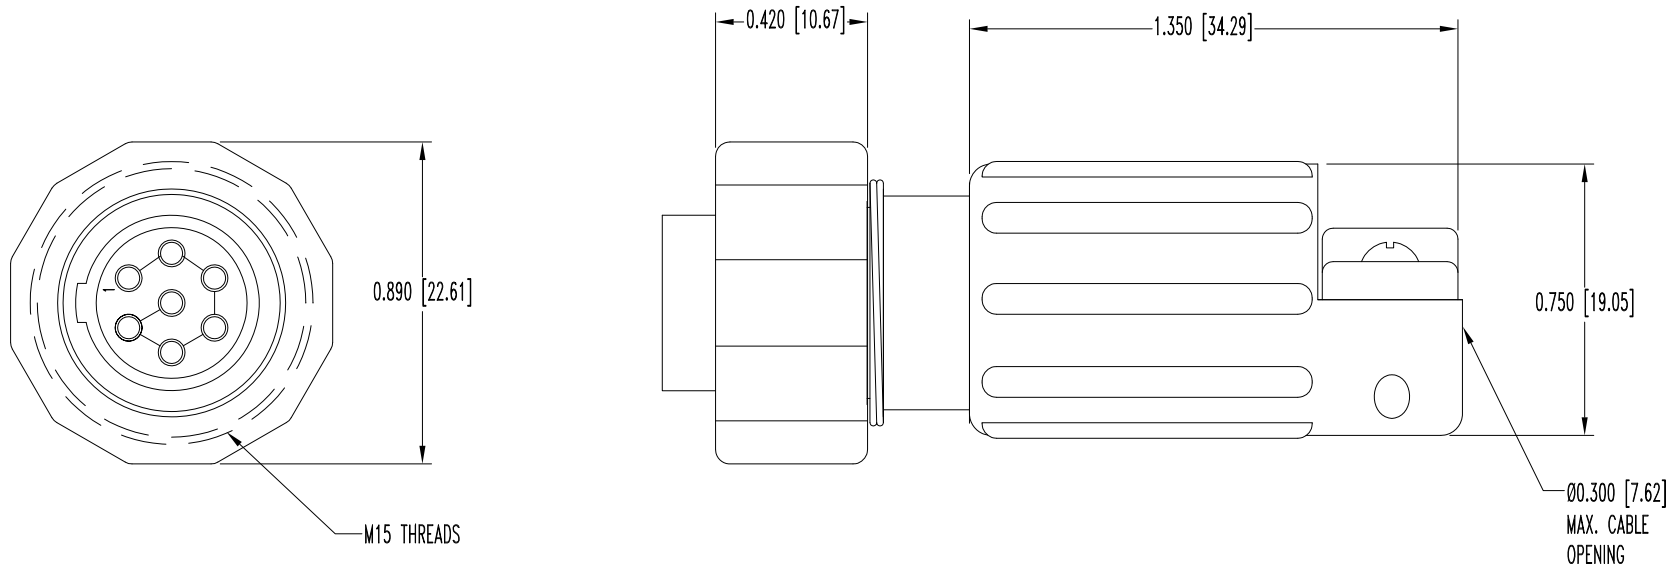

NOTES:

1. MATERIAL AND FINISHES:

- INSULATOR INSERT: GLASS-FILLED DAP, TYPE SDG-F, UL 94V-0, BLACK COLOR.
- HOOD AND CABLE CLAMPS: THERMOPLASTIC, ELECTROLESS NICKEL OVER COPPER PLATE.
- HOUSING AND COUPLING NUT: GLASS FILLED POLYESTER.
- O-RING: THERMOPLASTIC ELASTOMER.
- CABLE ADAPTERS: THERMOPLASTIC, ELECTROLESS NICKEL OVER COPPER PLATE.
- SCREWS: STAINLESS STEEL, PASSIVATED.

2. ELECTRICAL CHARACTERISTICS:

- INSULATOR RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3a, METHOD A.
- WORKING VOLTAGE: 300V RMS.
- CREEPAGE AND CLEARANCE DISTANCE: 0.063 [1.6] MIN.

3. WORKING TEMPERATURE: -55°C TO +125°C.

4. CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN 2003.

5. DIMENSIONS ARE IN INCHES [MILLIMETERS].

	POSITRONIC INDUSTRIES INC. www.connectpositronic.com		FSCM 28198
	FRONT RUNNER SERIES	SCALE N.T.S.	DRAWN BY YK APPROVED BY R WILLIAMS
DECIMAL TOL. ± 0.015 [0.38]	TITLE FR11FP722LM4/AA		
ANGULAR TOL. ± 5°	DATE 4-28-08	DRAWING NUMBER SK9397	REV. NC