
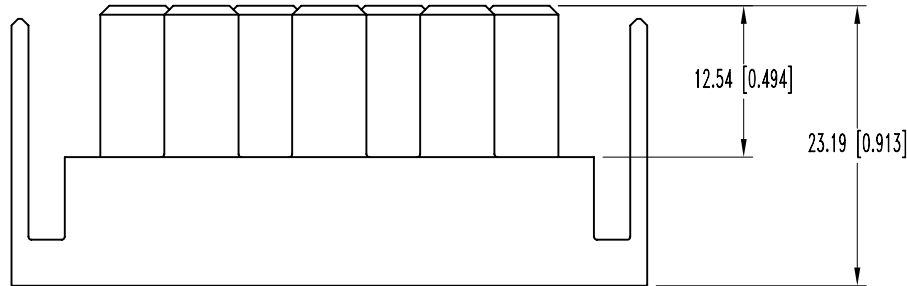



SK3768

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
5-21-01	NC	ECO 17771		JLG	

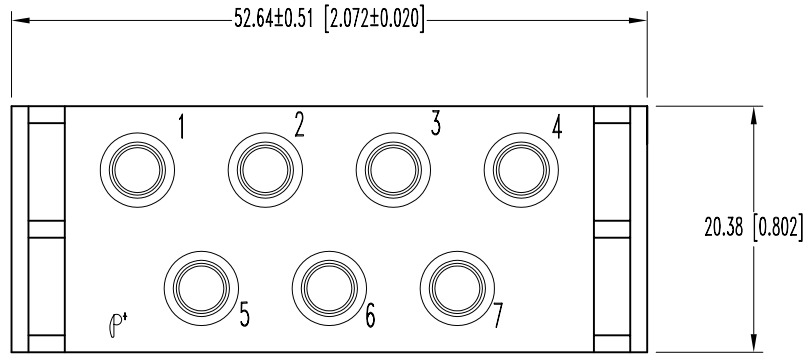

CHARACTERISTICS:
 INSULATION RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3A.
 WORKING VOLTAGE: 1,000 MINIMUM V r.m.s.
 WORKING TEMPERATURE: -55°C TO +125°C.
 3. DIMENSIONS ARE IN MILLIMETERS [INCHES].

	POSITRONIC INDUSTRIES INC. www.connectpositronic.com	
	DECIMAL TOL. ± 0.38 [0.015]	SCALE N.T.S.
DATE 5-21-01	DRAWING NUMBER SK3768	DRAWN BY J. GREEN APPROVED BY
ANGULAR TOL. ± 0	TITLE PLS7W7F0000	
	REV. NC	